



COCO-FX9-VMICRO MULTI VOLTAGE VMICRO JUNCTION BOX FOR SONY PXW- FX9

User Manual

**WE STRONGLY RECOMMEND THAT YOU
READ THIS INSTRUCTION BEFORE USING
YOUR BEBOB COCO-FX9-VMICRO
ADAPTER! PLEASE KEEP THIS MANUAL
FOR FUTURE REFERENCE**


Features

- Mounts onto the back of the SONX PXW-FX9
- Multi Voltage 5,0V, 14,4V unreg, 19,5V
- 5 Outputs (1x USB, 1 Lemo 2p, 2 Twist Dtap, 1 Cinch)
- 1 XLR4 Input with Hotswap function
- Main On-Off Switch with led for all accessories Output
- 5 led dimmable/Switchable Fuel Gauge

Hotswap functionality

- Keep a BPU-35 in a camera to Swap the Vmount without interruption
- Plug an external 10-17V Power Source into the XLR4 IN to Swap the Vmount battery without interruption
- Swap one Vmicro battery after the other

Fuel Gauge

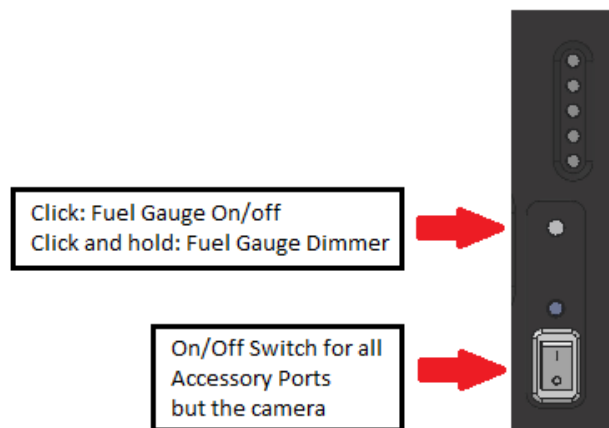

Safety instructions

- Only for professional use! Keep the COCO-FX9-VMICRO out of reach of children and personnel that has not been instructed in the use!
- Use only with recommended batteries.
- Keep the COCO-FX9-VMICRO dry and do not immerse in water.
- Do not attempt to open or repair the COCO-FX9-VMICRO. Contact your dealer for help if it becomes defective.
- Handle with care! Do not throw! Do not drop!
- Remove the battery from the COCO-FX9-VMICRO when not in use for a longer period of time

Warranty

- The COCO-FX9-VMICRO is covered by a 2 years unconditional warranty on all parts.
- For warranty issues or if you have any additional questions, please contact the appropriate bebob distributor listed at www.bebob.de.

Specifications

| | |
|--------------------|--|
| Model | COCO-FX9-VMICRO |
| Material | Aluminium |
| Battery Mount | 2 Vmicro |
| Voltages | 5,0V/14,4V unreg/19,5V |
| Max. Draw | Depends on battery |
| Twist D-Tap | 2 (14,4V unreg. / max. 5.0A) Self-reset Fuse |
| USB Port | 1 (5,0V / max. 1,0A) Self-reset Fuse |
| Lemo 2p | 1 (14,4V unreg. / max. 2,0A) Self reset Fuse |
| XLR4 IN | 1 (10 to 17V) Hotswap |
| Dimensions (WXHxD) | 45x 141 x 42mm |
| Weight | 0,43 Kg |