


PS PANEL



Power-Spot LED Panel Light
PS 1300D/1300B

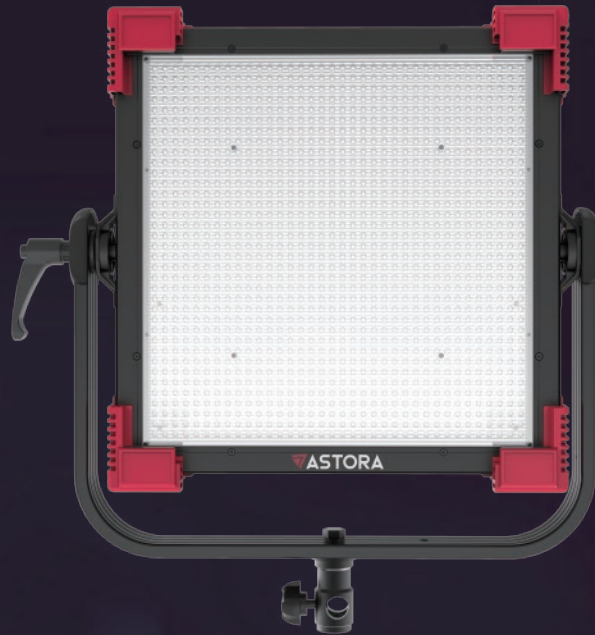

Ultra-Bright

98
TLCI

TLCI up to 98




Flicker Free



Passive cooling

DIMENSIONS

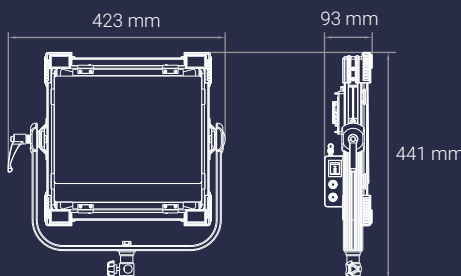

Model	Item No.	EAN Code	Net Weight
ASTORA PS 1300D	16022302	4250972501647	3.4 kg (7 lbs)
ASTORA PS 1300B	16022202	4250972501630	3.4 kg (7 lbs)

Note Protection Mark according to DIN 34

SPECIFICATION

MODEL	ASTORA PS 1300D	ASTORA PS 1300B
LED SOURCE		
Color Temperature	5600 K	3200-5600K variable
Number of LEDs	1296	
TLCI	94-98	
Color Rendering Index CRI	93-97	
Beam Angle	30°	
Power Variation	0-100% variable	
Power Consumption	86.4 W	
POWER OPTIONS		
Input voltage	12-24V	
DC power plug	XLR-4	
AC Power Supply	DC 15V 8A	
V-mount Battery	12-24V	
GENERAL		
Thermal Design	Silent Passive Cooling	
Protection Class	IP 20	
Certifications	CE, FCC, RoHS, REACH	

All specifications are nominal / typical values.

PHOTOMETRIC DATA (preliminary results)

