

datavideo

All-in-One 4K Production Studio



ShowCast 100

Switch, camera control, built-in monitor, audio mixing, recording* and streaming* all from a single unit streamlining your workflow.


Key Features:

- 4K 60/p live video production ideal for IMAG applications
- Integrated PTZ camera control with focus, white balance, & iris
- H.264 dual streaming & recording encoder*
- Audio mixer for mixing embedded and external audio sources
- Tactile buttons combined with 15" intuitive touch screen interface with transition controller

*Streaming and recording max resolutions at 1080p/60.

www.datavideo.com

4K Production Studio Workflow

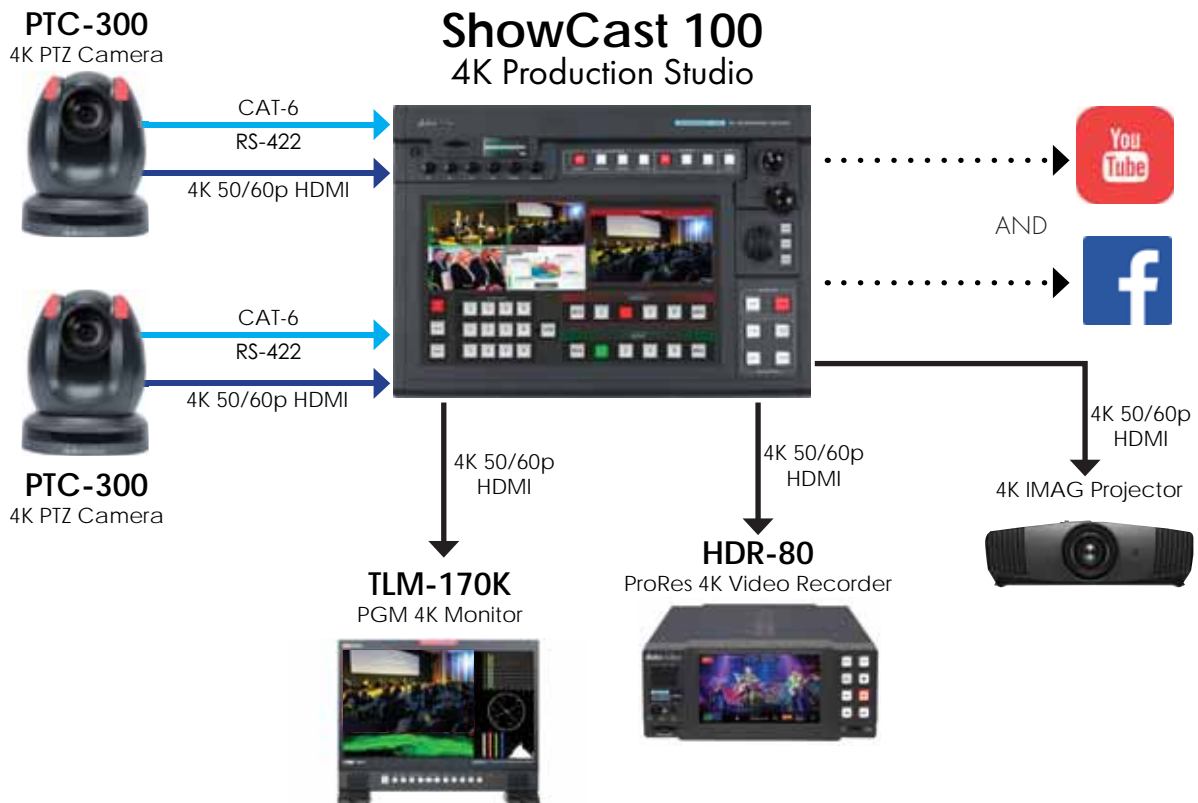

Applications

- Worship
- Corporate
- Live Events
- Conference

Disclaimers of Product and Services: This sheet is intended as a guide only. We reserve the right to change specifications, prices, and availability without prior notice. MSRP listed in USD. While we strive for complete accuracy, be aware that it may contain errors and omissions. Prior to purchase, please check with your local Datavideo office or authorized distributor.

Umschalter

4K ShowCast Streaming Studio

ShowCast 100

| | |
|------------------------------------|---|
| Video Standard | HD & SD |
| Video Format | <p>Input: 3840x2160p: 60/59.94/50/30/29.97/25/24/23.98 1080p: 60/59.94/50/30/29.97/25/24/23.98 1080i: 60/59.94/50, 720p: 60/59.94/50 VGA, XGA (1024 x 768), SXGA (1280 x 1024), UXGA (1600 x 1200), WUXGA (1920 x 1200)</p> <p>Output: 3840x2160p: 60/59.94/50/30/29.97/25/24/23.98 1080p: 60/59.94/50/30/29.97/25/24/23.98 1080i: 60/59.94/50, 720p: 60/59.94/50</p> |
| Video Processing | 4K60 YUV4:4:4 8bit, YUV 4:2:2 8/10bit, YUV 4:2:0 8bit, RGB 4:4:4 8bit 4K30 YUV4:4:4 8/10/12bit, YUV 4:2:2 8/10/12bit, YUV 4:2:0 8bit, RGB 4:4:4 8/10/12bit HD YUV4:4:4 8/10/12bit, YUV 4:2:2 8/10/12bit, RGB 4:4:4 8/10/12bit |
| Input Routable / Crosspoint | N/A |
| Video Input | 4 x HDMI 2.0 |
| Mix HD & SD Source | ---- |
| Computer Graphic Interface | 4 via HDMI |
| Video Output | 3 x HDMI 2.0 for PGM 1 x HDMI for CG Preview |
| Down-converted Output | Yes |
| Built-in Multi-view Monitoring Out | On 14" Touch Panel |
| Analogue Audio Input | 2 x 3 Pin XLR / 1/4" (6.3mm) Combo Socket 1 x Stereo RCA set (L/R) Audio Input Switch: Stereo / Mono |
| Analogue Audio Output | 1 x Stereo RCA set (L/R) 1 x Stereo headphone (Mini Jack with volume control) |
| Digital Embedded Audio Support | Input 2 channels, Output 2 channels |
| Audio Delay Calibration | Up to 200ms |
| A+V Switching | Yes |
| Chromakey | ---- |
| Title Creator | Web GUI |
| USK | Lumakey |
| DSK | ---- |
| Picture in Picture | ---- |

| | |
|-------------------------|---|
| Logo Insertion | ---- |
| Still Store | ---- |
| Effects | Seamless Cut, WIPE, Mix |
| Transition Preview | ---- |
| Sync / Reference In/Out | Built-in Genlock (internal) |
| Tally Output | D-Sub -15 Male connector |
| PC Remote Control | Web browser UI for configuration and control Socket commands |
| Camera Control | DVIP/ RS-422/ RS-232 |
| Built-in Audio Mixer | Yes |
| Storage | 1 x SD Card Slot Supports SD, SDHC and SDXC card (UHS-I) (Class 10 above) |
| Recording File System | FAT, NTFS, exFAT |
| Recording File Format | MP4 |
| Video Encode | 1 H.264 / AVC, Main/ High Profile 1 Record Only: Up to 16Mbps (1080p 50/60) Stream Only: Up to 10Mbps (1080p 50/60) Rec and Stream: Up to 10Mbps (1080p 25/30) Rec and Stream: Up to 36Mbps (1080p50/60), Dual Stream |
| Audio Encode | AAC-LC Configurable bit rate range from 32Kbps to 384Kbps Sample rate: 48KHz, 16bit |
| Streaming Protocol | TS over TCP/UDP (unicast & multicast) RTSP over HTTP/TCP/UDP (RTSP Elementary Streaming) RTMP (Publish) |
| Firmware Update | Ethernet, USB |
| Special Features | 14.0" Touchscreen Display |
| Chassis | Unibody |
| Dimension (LxWxH) | 437.6 x 330.5 x 96.5mm |
| Weight | 5.4 Kg |
| Power | DC 12V |
| Operating Temp. Range | 0~40 °C |
| What's in the Box | 1 x Showcast 100 product 1 x AD Switch DC 12V with AC Cord |