


**Lupo**  
Made in Italy

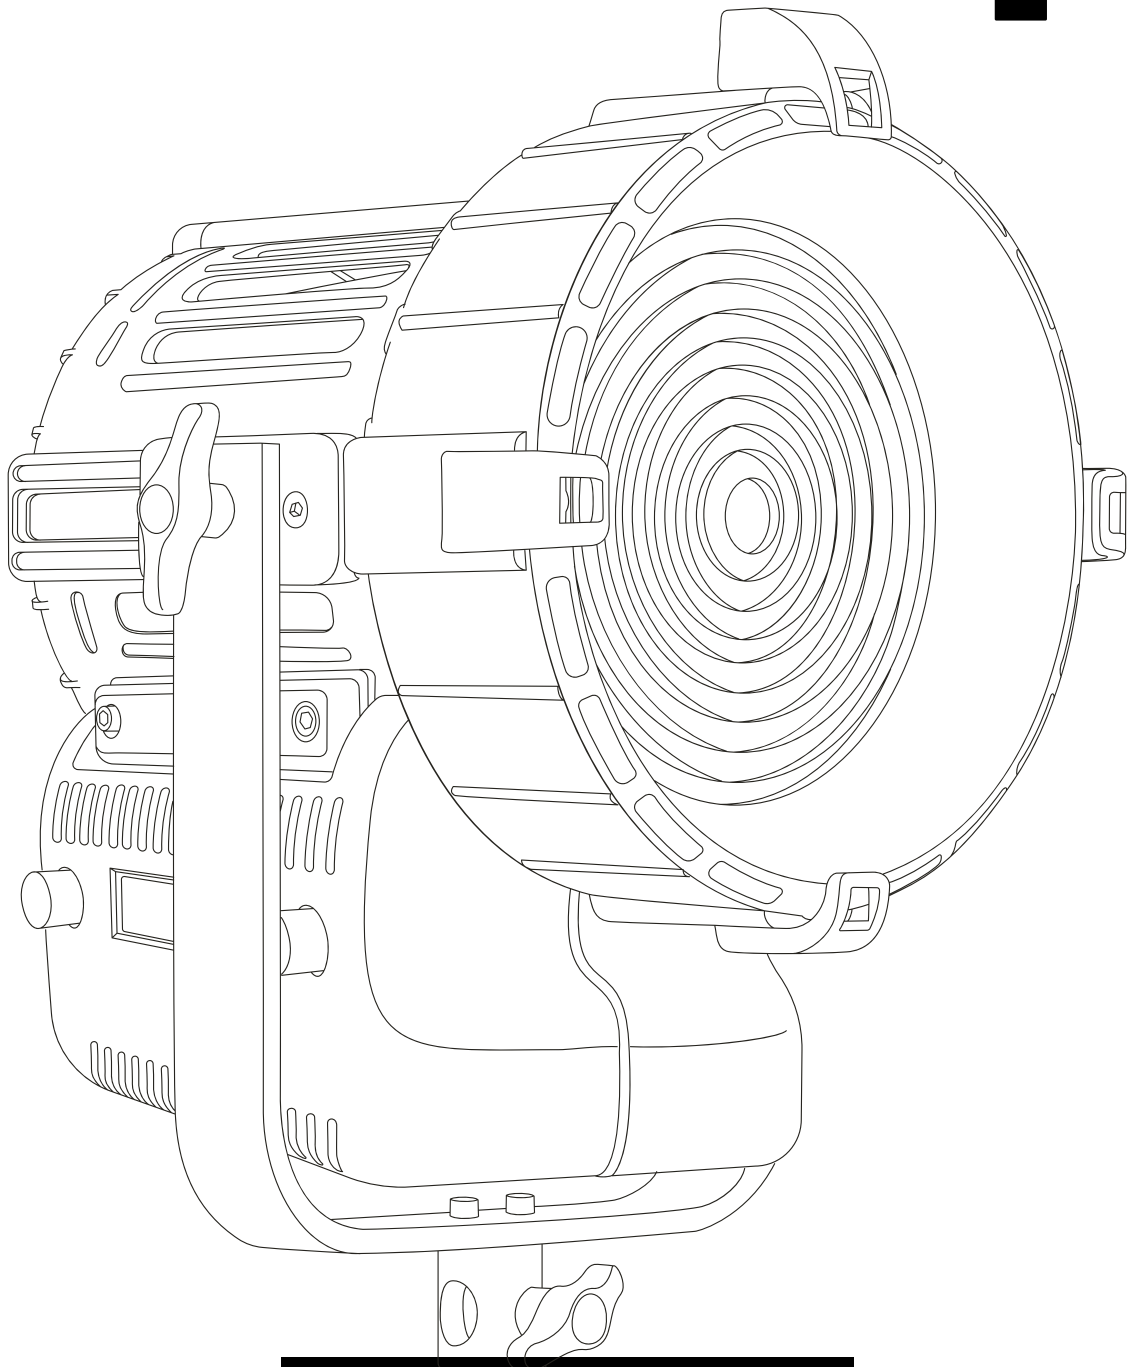

Cod 308 PRO

# DayledPRO 2000 Full Color

## Technical Data

Dimensions (cm)	270 x 325 x 312 mm
Dimensions (in)	10.6 x 12.7 x 12.2 in
Weight (kg)	6 kg
Weight (lb)	13.2 lb
CRI (Colour Rendering Index)	96
TLCI (Television Lighting Consistency Index)	95
Estimated LED lifetime (L80)	50,000 hours
LED COB	220 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR	included
4 pin connector (pin 1: negative / pin 4: positive)	
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	220 W
Watt output (equivalent to tungsten)	2000 W
Fresnel lens	200 mm
Firmware upgrades	through USB port
Colour temperature	2800 K - 10000 K
Voltage AC	90 V - 240 V
Light beam	10° - 60°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power Factor	0.96

Photometric data	6500 K		5600 K		3200 K	
	spot	flood	spot	flood	spot	flood
Distance						
Lux at 1 m - 3.2 ft	75000	13000	74000	12700	67000	12300
Lux at 2 m - 6.5 ft	20000	3400	19000	3370	18100	3320
Lux at 3 m - 9.8 ft	8800	1650	8500	1550	8250	1530
Lux at 4 m - 13.1 ft	4900	960	4600	930	4500	900
Lux at 5 m - 16.4 ft	3200	640	3000	615	2800	600

# Mode Options

## **CCT (Correlated Color Temperature)**

Mode for variable color temperature control from 2700 K to 10000 K with the addition of plus and minus green/magenta offset.

---

## **HSI (Hue, Saturation and Intensity)**

Mode for full color control.

---

## **RGBW**

Mode for control of Red, Green, Blue and White independently.

---

## **Preset**

Mode for a selected variety of gels.

---

# Technical Drawing

