

# FW568 V2 Custom 3D LUT 5.5" FHD ON-CAMERA MONITOR


Super Light Ideal for Gimbal & Stabilizer



-   
**FHD Resolution**  
1920X1152
-   
**3D LUT**  
Custom 3D LUT
-   
**4K HDMI**  
4K HDMI In&Out
-   
**DC OUT**  
DC OUT Power for Camera
-   
**F970/LP-E6**  
Dual-purpose Battery Plate
-   
**Tilt Arm Mounting**
-   
**175g**  
Lightweight Design





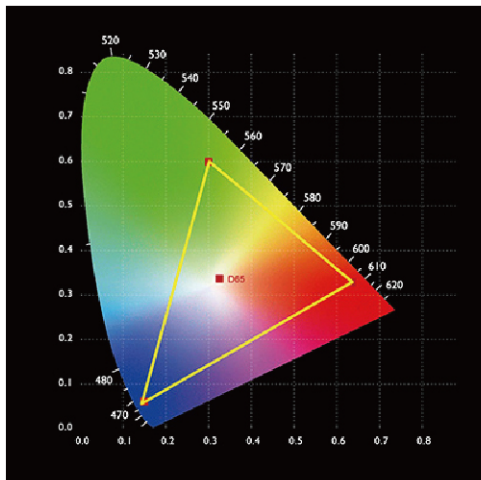









## USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD




## FEATURES

- 5.5-inch 1920x1152 full HD IPS screen
- Super lightweight ideal for gimbal
- Simple and intuitive button operation
- Supports 3D LUT Log to REC.709 and user 3D LUT upload (up to 32)
- With Waveform, Vectorscope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- F970 & LP-E6 dual-purpose battery plate, meet the different selection
- Stereo Earphone output
- DC 8.4V power out to power your DSLR camera or mirrorless camera

## PROFESSIONAL AND RICH AUXILIARY FUNCTIONS

- |  |  |   |  |   |  |
|--|--|---|--|---|--|
| <br><b>3D LUT</b>       | <br><b>Waveform</b> | <br><b>Vector Scope</b> | <br><b>Histogram</b>  | <br><b>Anamorphic Mode</b> | <br><b>Peaking Filter</b> |
| <br><b>False Colors</b> | <br><b>Exposure</b> | <br><b>Zoom-in</b>      | <br><b>Image Flip</b> | <br><b>Embedded Audio</b>  | <br><b>Nine Grid</b>      |


## USB Upgrade/LUT file importing/Flexible Power Supply Mode

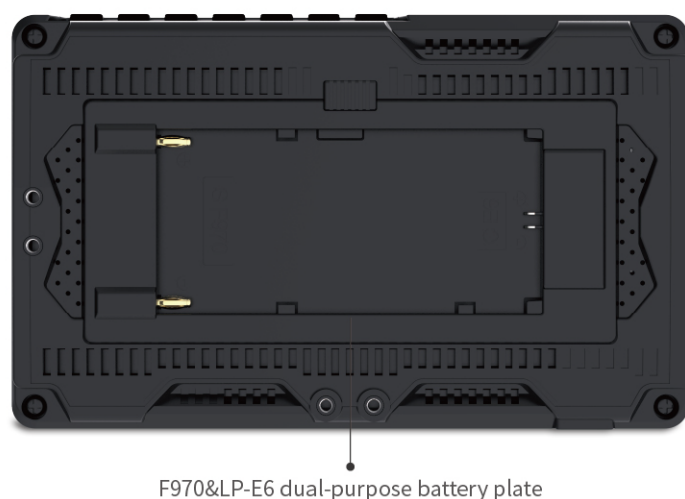





## >> PARAMETER

Model	FW568-V2
Screen size	5.5" IPS
Display Colors	16.7M (8 bit)
Color Gamut	70% NTSC
Resolution	1920x1152 pixels
Dot pitch	0.0639 (H) × 0.0213 (W) mm
Aspect Ratio	16:9
Brightness	500cd/m <sup>2</sup>
Contrast	1000:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI
Output	HDMI, DC OUT 8.4V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
Audio	3.5mm Stereo Headphone
HDMI Support Format	480i/576i/480p/576p
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
	4K UHD 3840 × 2160p (30/29.97/25/24/23.98Hz), 4096 × 2160p (24Hz)
Power Consumption	≤9W
Input Voltage	DC7 ~24V
Power Connector	DC
Battery Plate	F970/ LP-E6 Dual-purpose Battery Plate
Operating Temperature	-20°C ~ 55°C
Storage Temperature	-30°C ~ 65°C
Install Way	¼-20 thread points (bottom, right)
Unit Size	142Lx87.2Hx27.5D (mm)
Unit Weight	175g
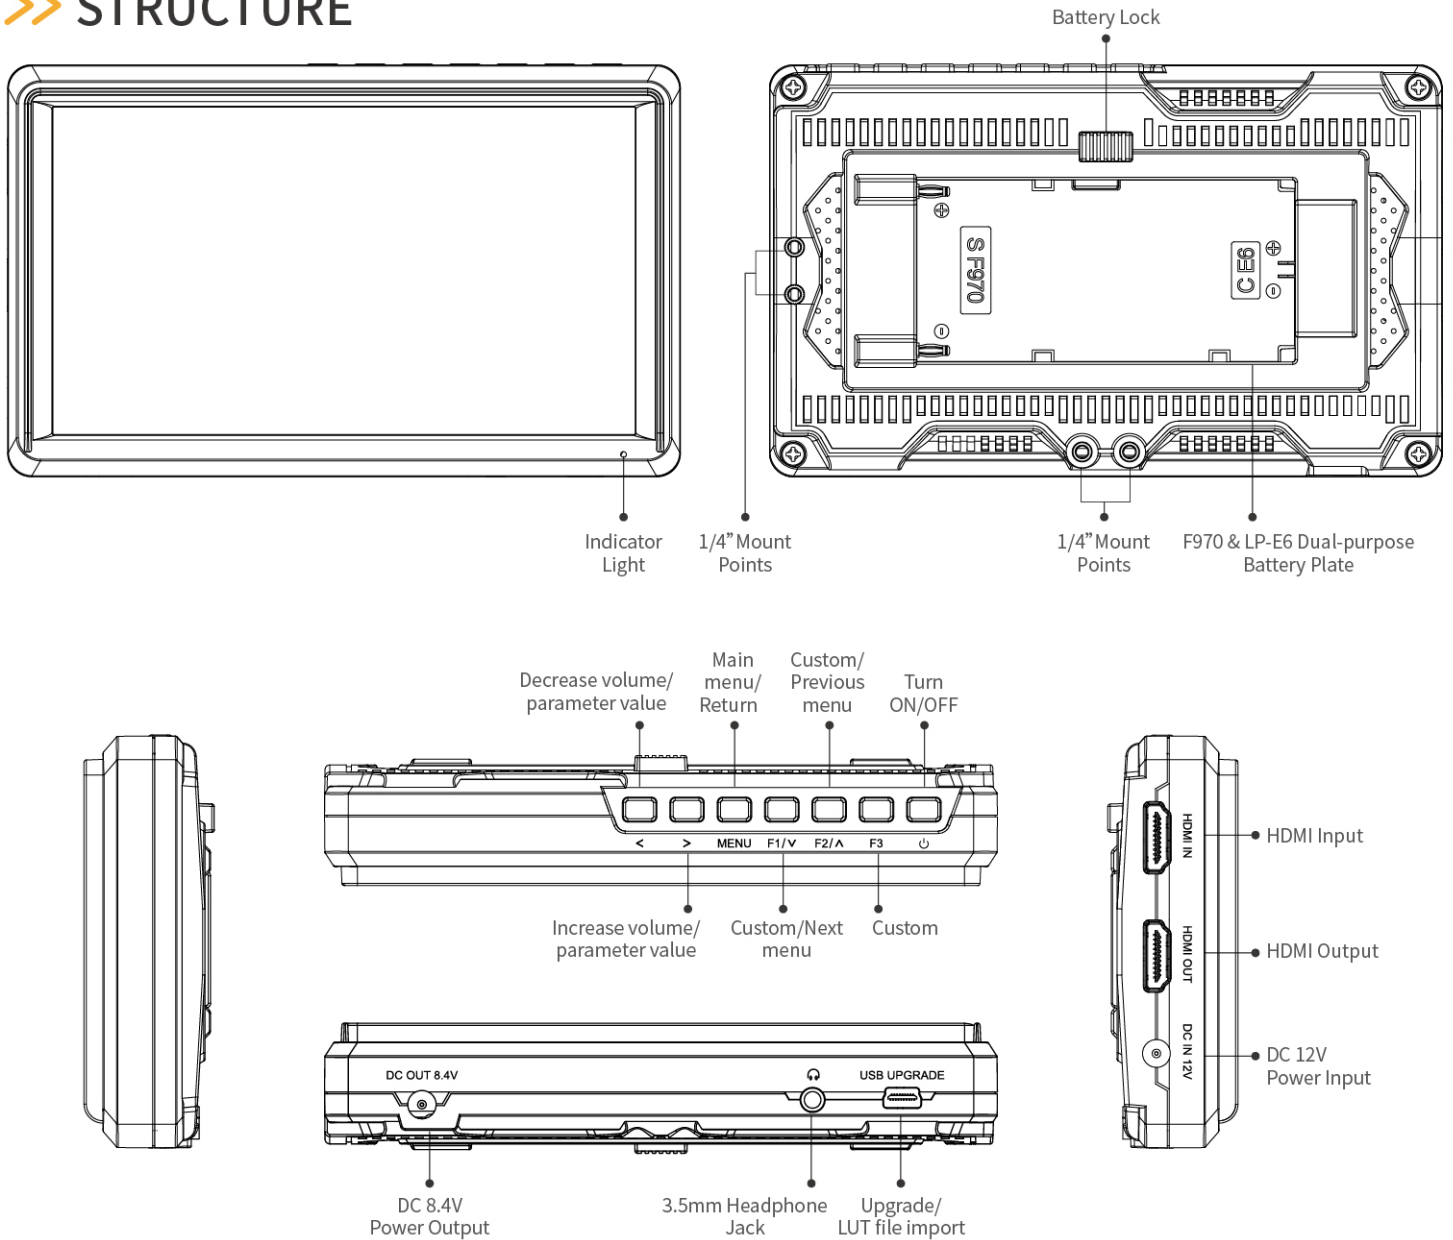
## >> STRUCTURE



## >> PACKING LIST

 <p>Monitor</p>	 <p>Micro HDMI Cable</p>	 <p>Sunshade</p>	 <p>Tilt Arm</p>	 <p>User manual</p>
--	---	---	--	--



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2672627

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn