


**Lupo**  
Made in Italy

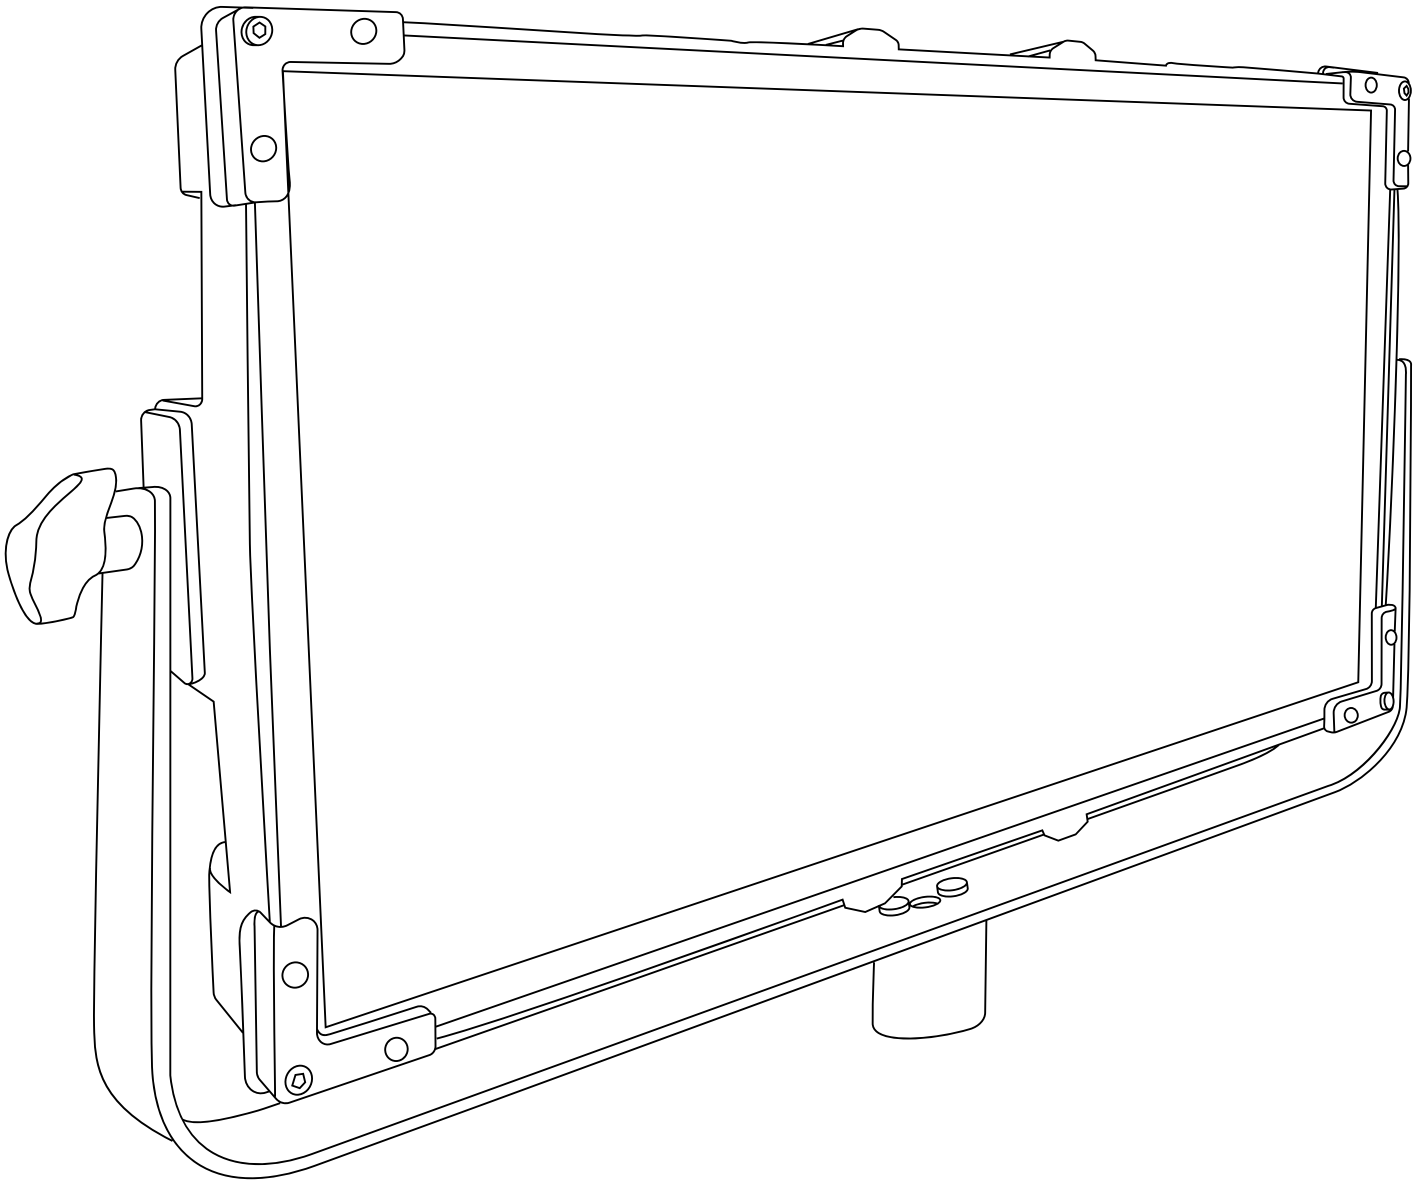

Cod 814 PRO

# UltrapanelPRO





## Dual Color 60 Soft

## Technical Data

|   |                                  |
|---|----------------------------------|
| Dimensions (cm)   | 691 x 465 x 121 mm               |
| Dimensions (in)   | 27.2 x 18.3 x 4.21 in            |
| Weight (kg)   | 9 kg                             |
| Weight (lb)   | 19.8 lb                          |
| CRI (Colour Rendering Index)  | 95                               |
| TLCI (Television Lighting Consistency Index)  | 96                               |
| Estimated LED lifetime (L80)  | 50,000 hours                     |
| Dimmer 0 - 100  | included                         |
| Dimming curves mode   | Linear, Exponential, Logarithmic |
| DMX module  | included                         |
| DMX (bit)   | 8 bit / 16 bit                   |
| Connection for 14.8 V battery with 1 standard XLR 4 pin connector (pin 1: negative / pin 4: positive) | included                         |
| Standard XLR 5 pin connectors to DMX console  | included                         |
| Watt consumption  | 440 W                            |
| Watt output (equivalent to tungsten)  | 8000 W                           |
| Firmware upgrades   | through USB port                 |
| Colour temperature  | 2800 K - 6500 K                  |
| Voltage AC  | 90 V - 240 V                     |
| Voltage DC  | 14.8 V                           |
| Light beam  | 120°                             |
| Frequency (input)   | 50 / 60 Hz                       |
| Compliance  | CE                               |
| Remote control  | Bluetooth Long Range / DMX / RDM |
| Ambient temperature   | Max: + 45°C / Min: - 10°C        |
| Power factor  | 0.9                              |

| Photometric data     | 6500 K | 5600 K | 3200 K |
|----------------------|--------|--------|--------|
| Distance             |        |        |        |
| Lux at 1 m - 3.2 ft  | 17300  | 16600  | 15100  |
| Lux at 2 m - 6.5 ft  | 4400   | 4280   | 4050   |
| Lux at 3 m - 9.8 ft  | 2150   | 2080   | 1950   |
| Lux at 4 m - 13.1 ft | 1320   | 1290   | 1180   |
| Lux at 5 m - 16.4 ft | 850    | 840    | 800    |

# Technical Drawing

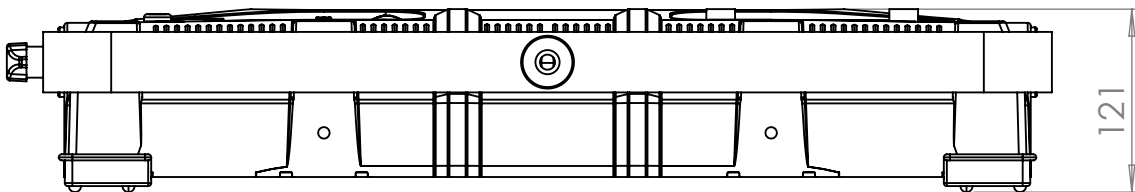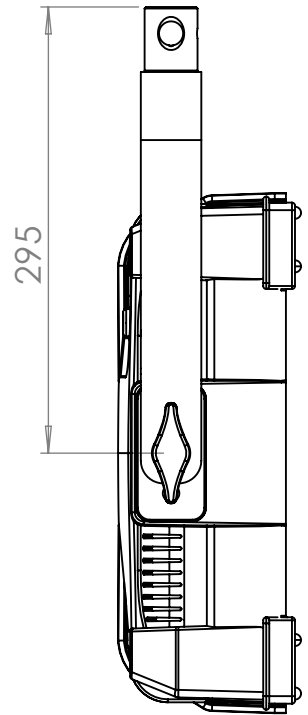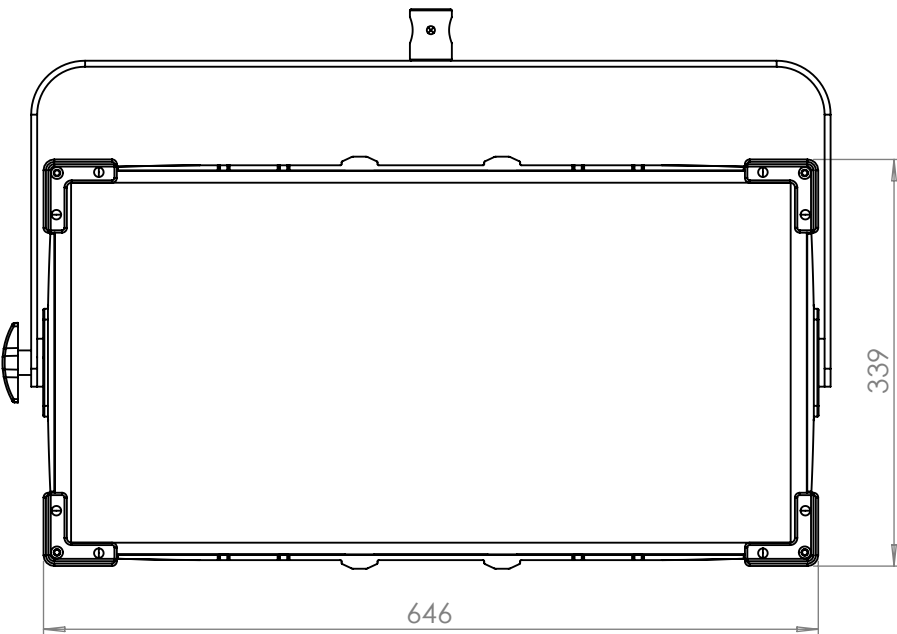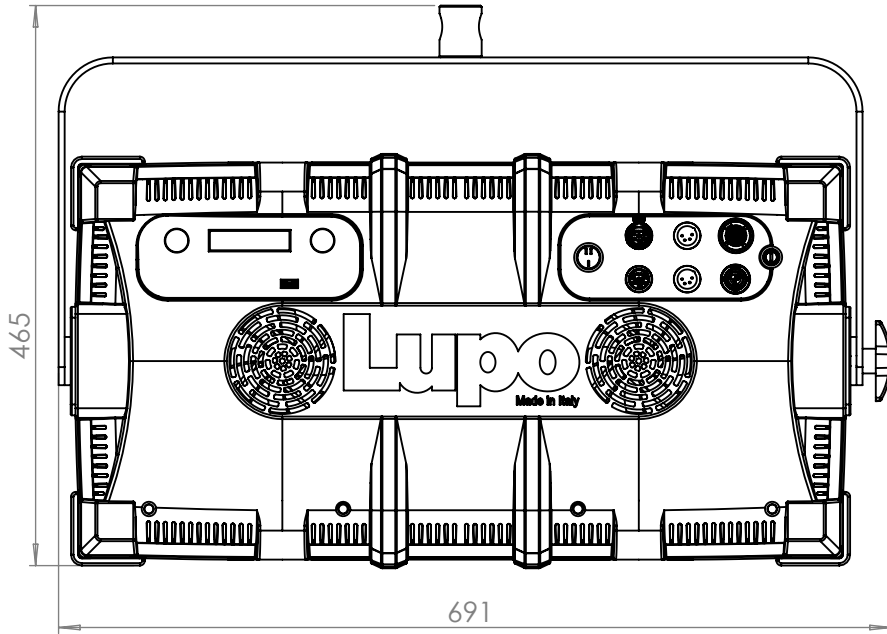

# Pole Operated Yoke

