LILLIPUT

Security monitor for Full HD CCTV security camera systems
& commercial hotel monitor

PVM150S

15.6"

SECURITY
SDI Monitor

HDR
HDR10 & HLG

1000NIT
HIGH BRIGHTNESS

FHD
1920×1080

4K HDMI
3G-SDI & VGA

4K HDMI
3G-SDI / VGA / Composite

HDMI 1.4b supports 4K 30Hz signal input.
SDI supports 3G-SDI, HD-SDI and SD-SDI signal inputs.
Universal VGA and AV composite ports can also meet different usage environments.

FHD
Resolution

Creatively integrated the **1920×1080** native resolution into a **15.6** inch LCD panel, which is far beyond from HD resolution.

1000 nit
High Brightness

Features with **1000 cd. 1000 cd/m²** high brightness & **178°** IPS/VA. As well as seeing every detail in massive FHD visual quality, it is sunlight readable in the open air.

HDR

When HDR is activated, the display reproduces a greater dynamic range of luminosity, allowing lighter and darker details to be displayed more clearly. Effectively enhancing the overall picture quality.

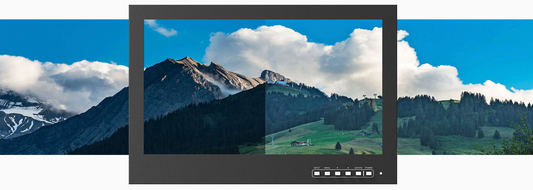

Without HDR
Inaccurate exposure, reduced image detail, unsatisfactory viewing experience.

With HDR
Enjoy sharper images, greater detail and richer colors. HDR10_SDI / 1000 / 10000 & HLG are for optional.

Security Camera Assist

As a monitor in security camera system to help with general store oversight by allowing managers and employees to keep an eye on multiple areas at once.

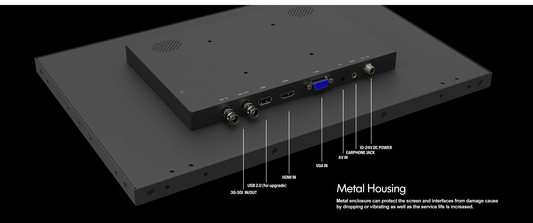

Metal Housing

Metal enclosure can protect the screen and interfaces from damage cause by dropping or vibrating as well as the service life is increased.

6U Rackmount

A 6U rack for a customized monitoring solution also supported for viewing from the different angles and images displays.

Desktop

Help with standing on the desktop by installing the base bracket on the bottom of monitor.

Carry-on

The portable aluminum case can completely store and protect the monitor so that it can be taken away at any time.

Wall-mount

It can be installed and fixed on the wall through the VESA 75mm screw holes at its back.

SPECIFICATIONS | ACCESSORIES

DISPLAY	Display Screen	15.6"
	Physical Resolution	1920×1080
	Aspect Ratio	16:9
	Brightness	1000 cd/m²
	Contrast	1000:1
	Viewing Angle	178°/178°(H/V)
INPUT	3G-SDI	1
	HDMI	HDMI 1.4b×1 (support 4K 30Hz)
	VGA	1
OUTPUT	AV	1
AUDIO	USB	USB 2.0 (for upgrade)
	3G-SDI loop	1
	Speaker	2
	Ear Jack	1
POWER	Current	≤2A(12V)
	Input Voltage	DC 10-24V
	Power Consumption	≤24W
ENVIRONMENT	Operating Temperature	-20℃~60℃
	Storage Temperature	-30℃~70℃
DIMENSION	Dimension(LWD)	389mm × 260mm × 37.6mm
	Weight	2.87kg

Note: Due to constant effort to improve products and product features, specifications may change without notice.

12V 3A DC Adapter

HDMI A-A Cable



AV Input Cable

VGA Cable

Desktop Bracket

Rackmount Bracket (optional)

Aluminum Case (optional)

Protection Bracket (optional)

www.lilliput.com

ZHANGZHOU LILLIPUT ELECTRONIC TECHNOLOGY CO., LTD.
Add: Lan Tian Economic Development Zone, Zhang Zhou, Fu Jian, 363005, China
Tel: +86-596-2109561/2109323 Fax: +86-596-2109511 Email: sales@lilliput.com