



17.3"
1RU PULL-OUT
RACK MOUNT
MONITOR

RM-1730S

Specific Monitor by LILLIPUT with Broadcast Quality for Full HD Camcorder & DSLR
Application for CCTV Monitoring & Making Movies.



Excellent Display

It features 17.3" 16:9 IPS panel with 1920x1080 full HD resolution, 700:1 high contrast, 178° wide viewing angles, 300cd/m² high brightness, which offers outstanding viewing experience.



Durable & Space-saving

Metal housing with pull-out drawer type design, which provides perfect protection for a 17.3 inch monitor from shock and drop. It's also convenient for portable outdoor, or applied in rack mount because of amazing space-saving design. Power will be off automatically when screen down and pushed in.



Cross Conversion

The HDMI output connector can actively transmit an HDMI input signal or output an HDMI signal that has been converted from an SDI signal. In short, signal transmits from SDI input to HDMI output and from HDMI input to SDI output.




Advanced Functions

Lilliput creatively integrated column (YRGB peak), time code, waveform, vector scope & audio level meter into field monitor. These assist users to accurately monitor when shooting, making and playing movies/videos.



1U Rack Mount
Intelligent SDI Monitoring

It has a variety of mounting methods for broadcast, on-site monitoring and live broadcast van, etc. A 1U rack design for a customized monitoring solution, which not only can save the space of rack greatly with a 17.3 inch monitor, but also viewed from different angles when monitoring.

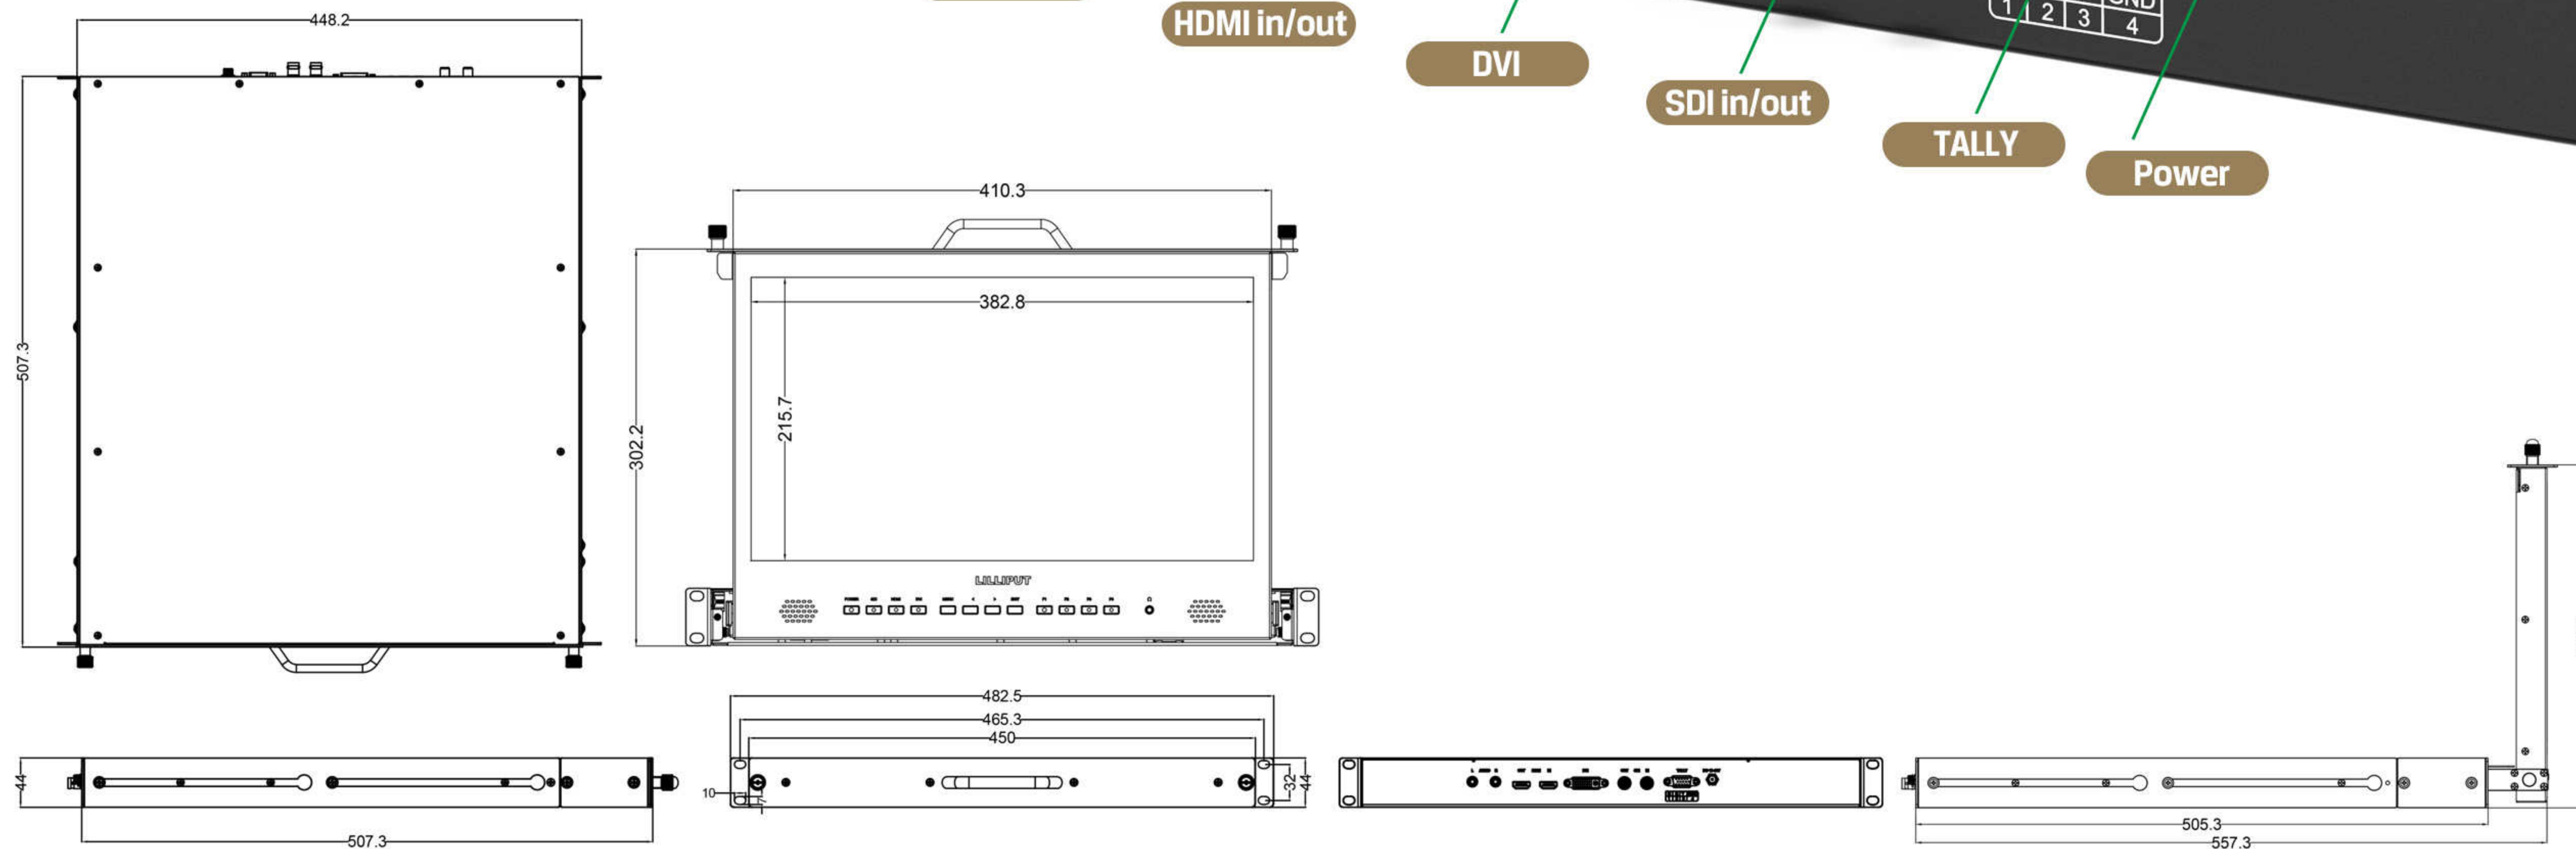

Slim & Portable Design

Patent No.: 201610862204.5 201621090715.1

We've applied patent for this innovation and 1RU pull-out rack mount structure. Slim and light weight design with metal housing, which is portable and convenient for studio, rack mount, broadcast van and other in/outdoor applications.

SPECIFICATIONS | ACCESSORIES

DISPLAY	Panel	17.3" IPS
	Physical Resolution	1920x1080
	Aspect Ratio	16:9
	Brightness	300cd/m²
	Contrast	700:1
INPUT	Viewing Angle	178° / 178° (H/V)
	3G-SDI	1
	HDMI	1
OUTPUT	DVI	1
	Audio	1
AUDIO	Tally	2 (L/R)
	Speaker	2
POWER	Ear Phone Slot	1
	Current	2.8A
ENVIRONMENT	Input Voltage	DC 10-18V
	Power Consumption	≤32W
	Operating Temperature	0℃~50℃
DIMENSION	Storage Temperature	-20℃~60℃
	Dimension (LWD)	482.5x44x507.5mm
	Weight	8.6kg

SDI Format	SMPTE-125M	480i(59.94)
		1080i(60/59.94/50)
	SMPTE-274M	1080p(30/29.97/25/24/24sF/23.98/23.98sF)
	SMPTE-292M	1080p(30/29.97/25/24/24sF/23.98/23.98sF)
	SMPTE-296M	720p(60/59.94/50/30/29.97/25/24/23.98)
		720p(60/59.94/50)
	SMPTE-372M	1080i(29.97/25/24/23.98)
		1080p(60/59.94/50/30/29.97/25/24/23.98)
	SMPTE-425M-AB	1080p(60/59.94/50)
		-Level A & Level B 720p(60/59.94/50/30/29.97/25/24/23.98)
HDMI Format	-Level B 2x	1080i(60/59.94/50)
	ITU-R BT.656	576i(50)
		1080p, 1080i, 720p, 576p, 576i, 480p, 486i

ACCESSORIES	15V DC adapter	1 piece
	TALLY connector (in bulk)	1 piece

Note: Due to constant effort to improve products and product features, specifications may change without notice.

