

PVM210 without SDI
PVM210S

21.5" Professional Video Monitor



High brightness Monitor with FHD Resolution, 101% Rec.709 color space. Application for live events, conference presentation, public view monitoring, etc.

Center & Safety Markers

Incomplete Image


Layout and Composition

The image output from the camera to TV live is often slashed. This monitor comes with Center Markers and Safety Markers, allowing to adjust the best angle of cameras in real time to show the most important images in center of shot.

Audio Level Meter

Audio Level Monitoring

With Audio Level Meter turned on, it is used to monitor current audio output and avoid being indifferent after an audio interruption as well as keep the sound within a reasonable DB range.

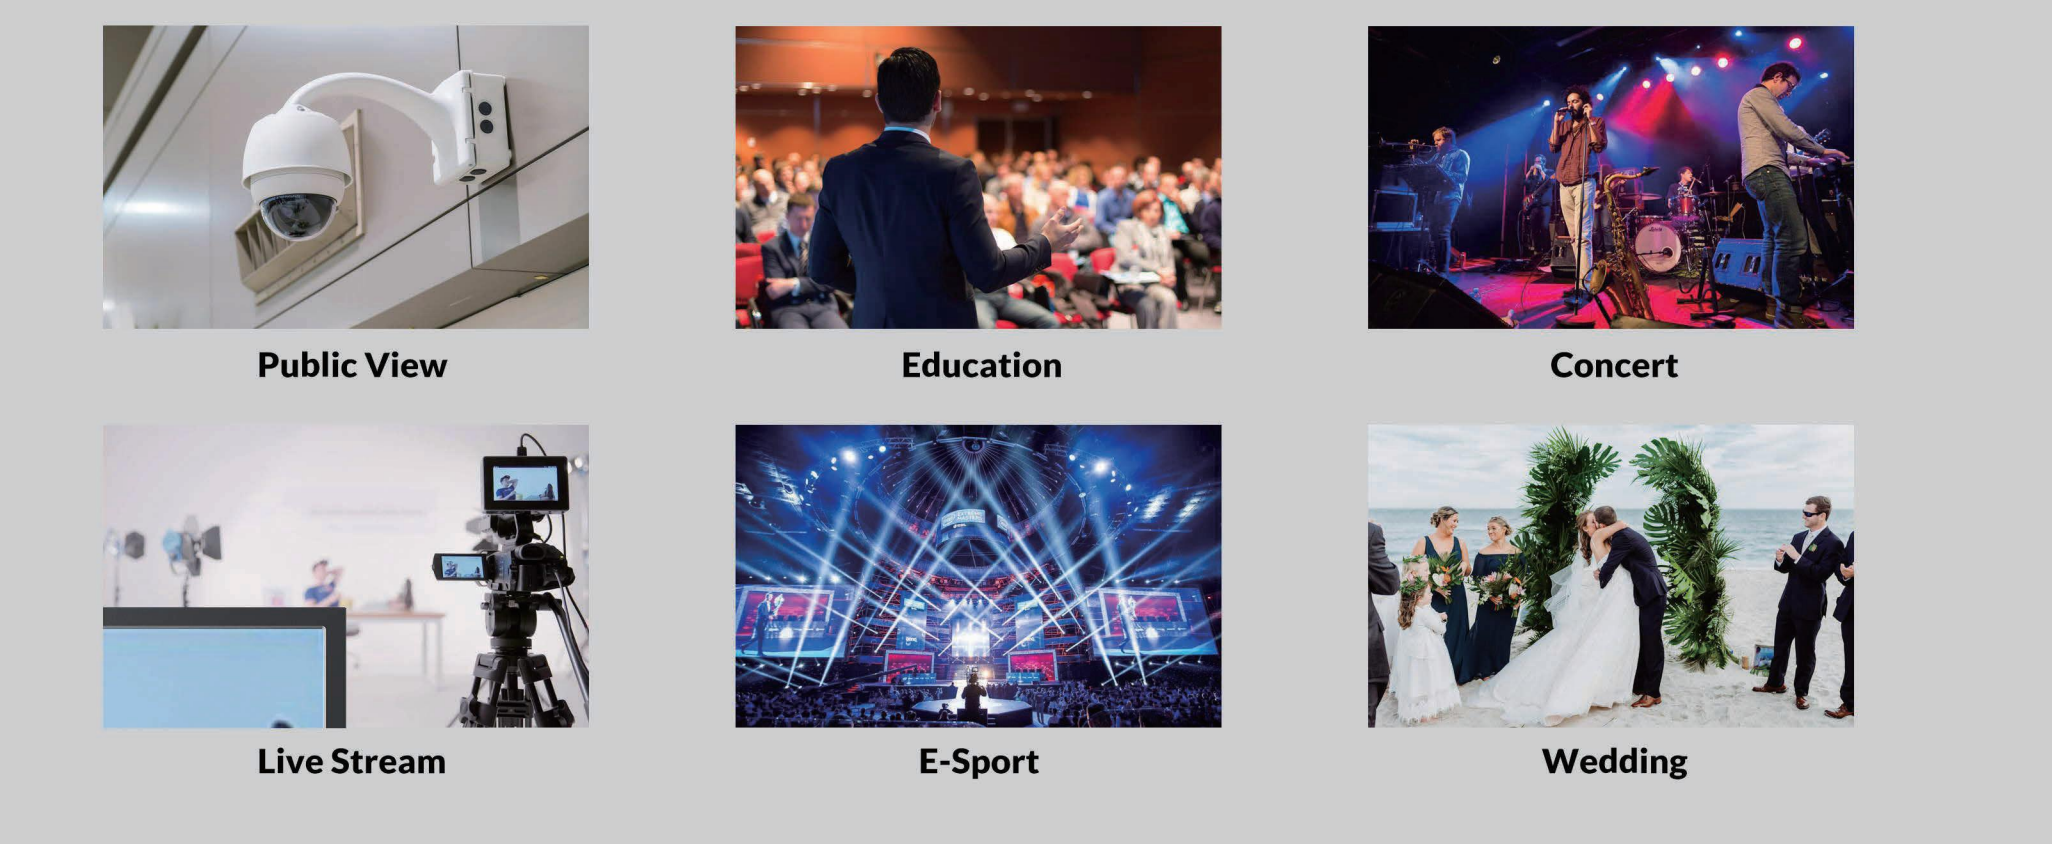


High-Bright 1000 nit

Without HDR vs With HDR comparison.

1000 nit High-Bright
Featuring an amazing 1000 nit High Bright LCD screen, with the sunshine readable screen which cover 101% Rec.709 color space, therefore the gear suitable for any innovative outdoor framing.

HDR
When HDR is activated, the display reproduces a greater dynamic range of luminosity, allowing lighter and darker details to be displayed more clearly. Effectively enhancing the overall picture quality.

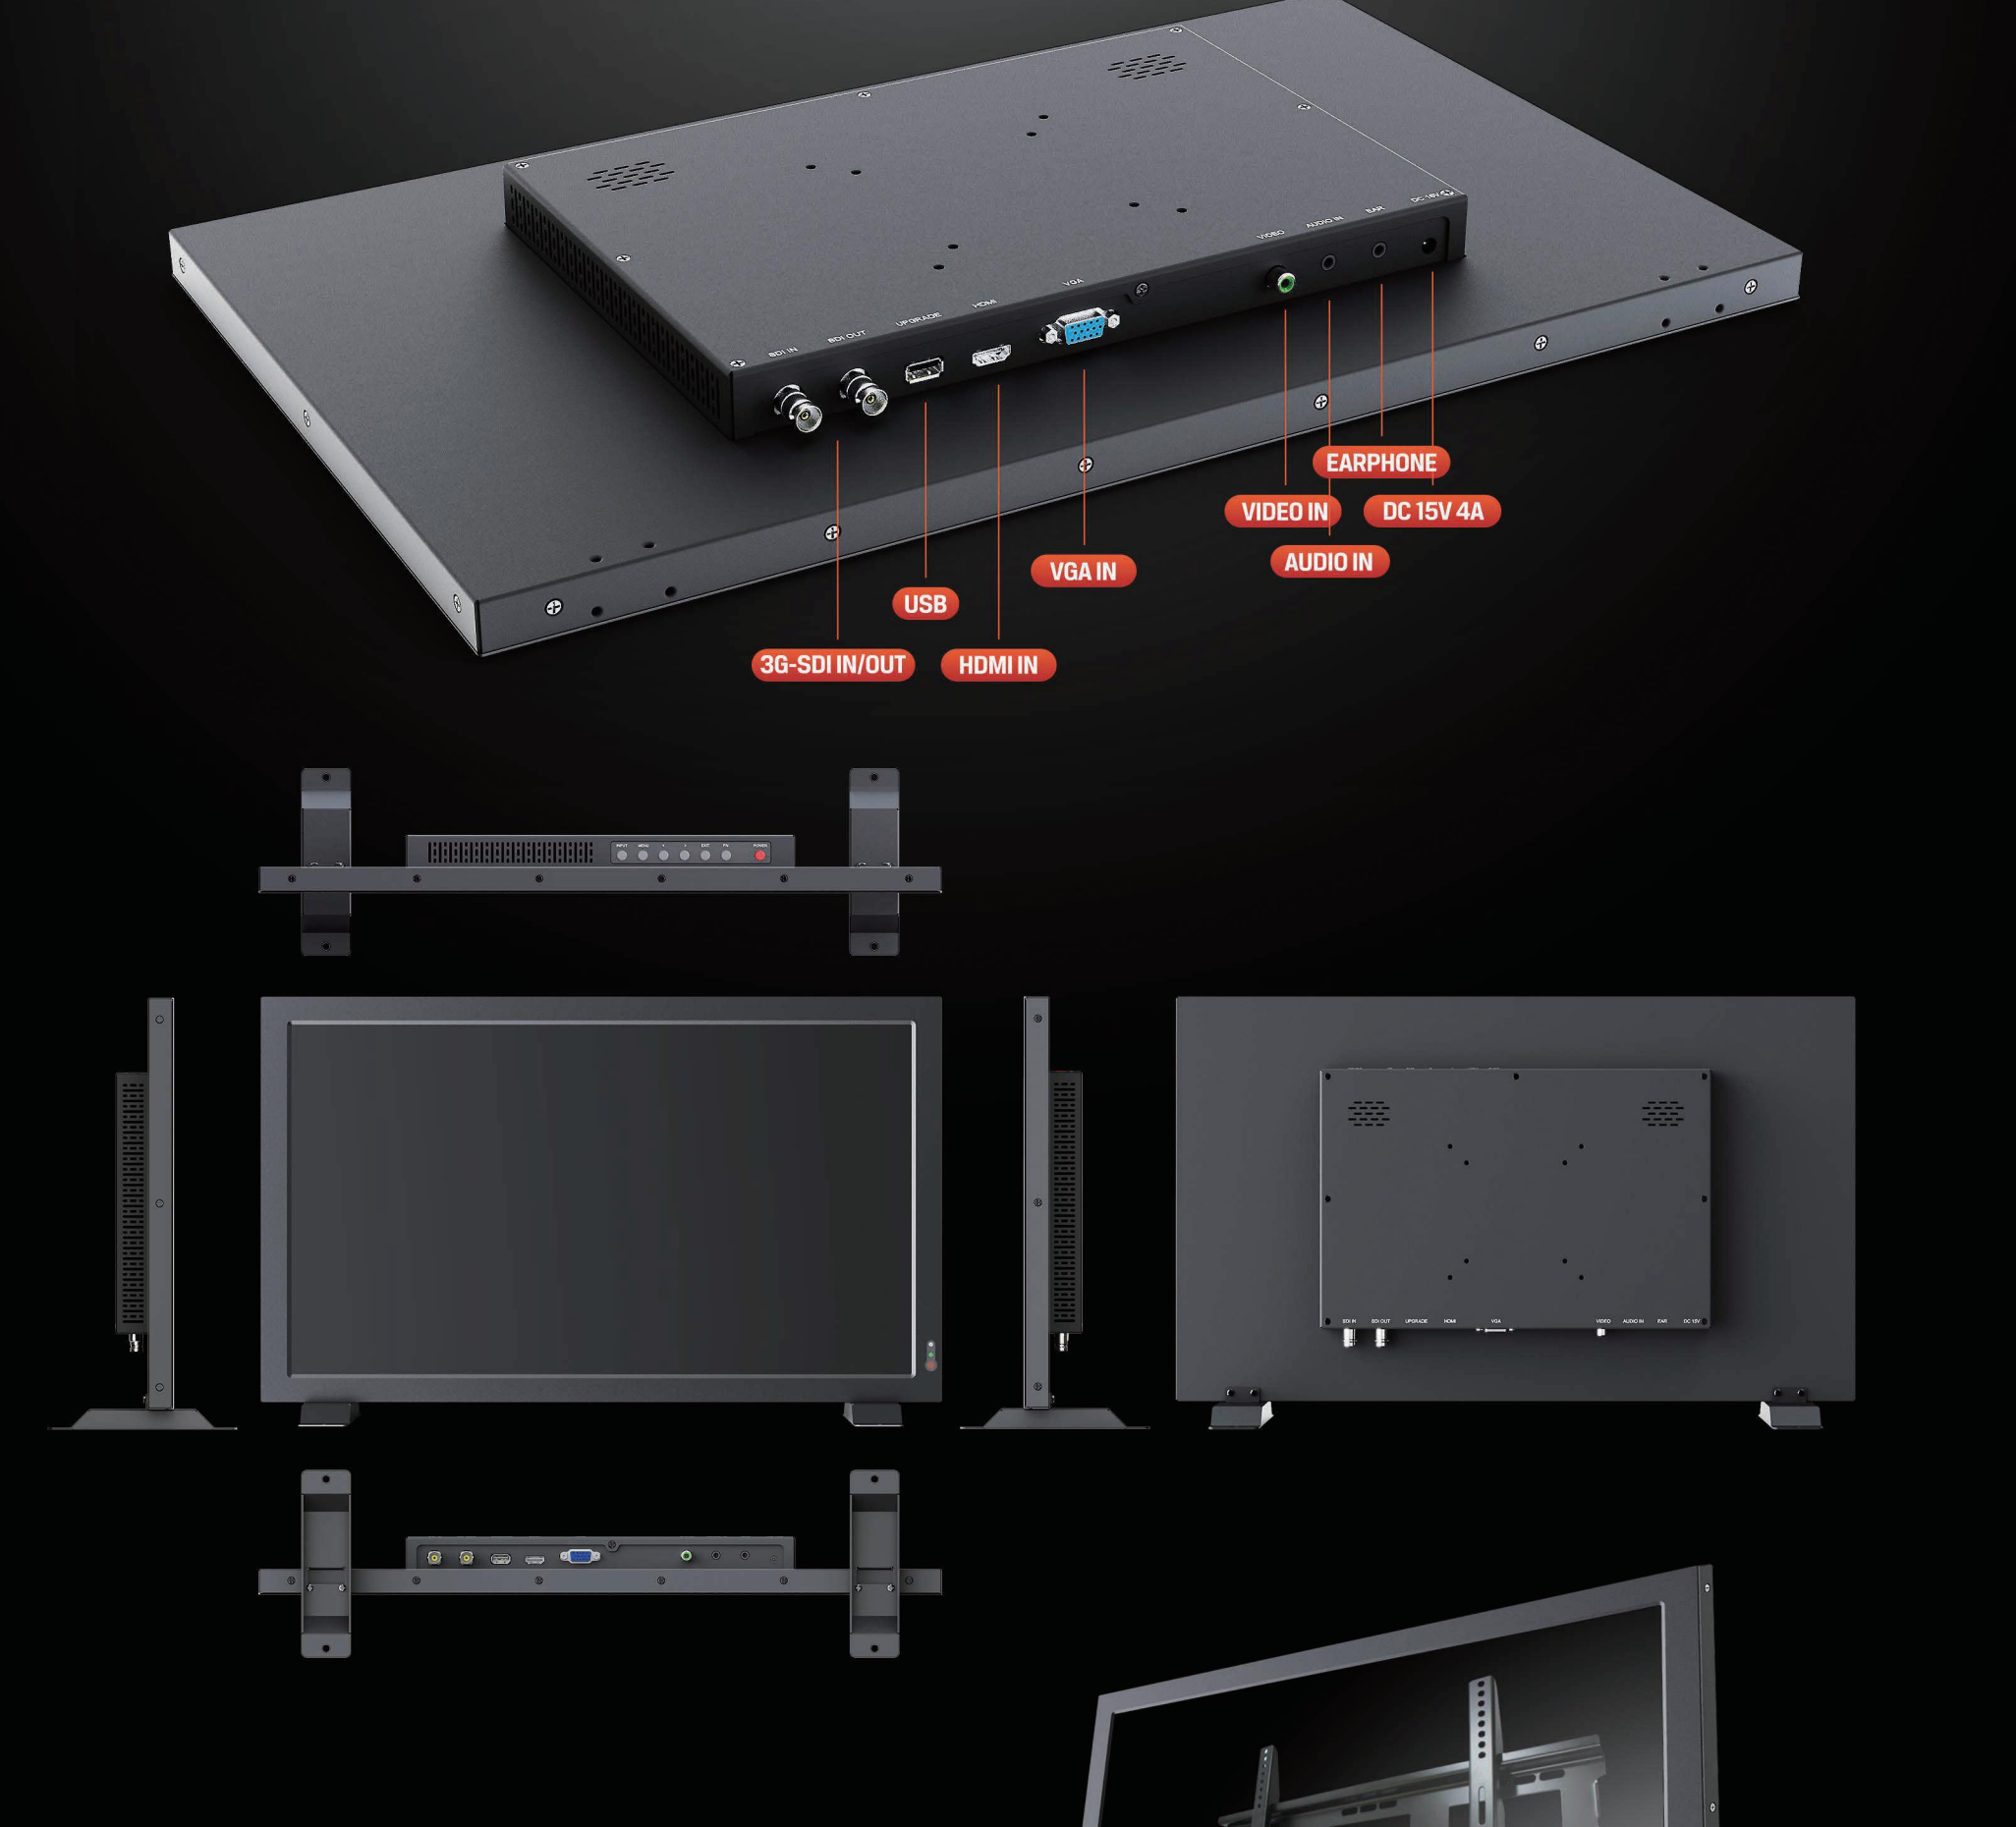

Wall-mount
It can be installed and fixed on the wall through the VESA 75/100 mm screw points at its back.

SPECIFICATIONS

	PVM210S	PVM210	
DISPLAY	Panel	21.5" LCD	21.5" LCD
	Physical Resolution	1920x1080	1920x1080
	Aspect Ratio	16:9	16:9
	Brightness	1000 cd/m ²	1000 cd/m ²
	Contrast	1500:1	1500:1
	Viewing Angle	170°/ 170°(H/V)	170°/ 170°(H/V)
INPUT	Color Space	101% Rec.709	101% Rec.709
	HDR Supported	HLG; ST2084 300/1000/10000	HLG; ST2084 300/1000/10000
OUTPUT	SDI	1 × 3G-SDI	-
	HDMI	1 × HDMI 1.4b	1 × HDMI 1.4b
	VGA	1	1
	AV	1	1
SUPPORTED FORMATS	SDI	1 × 3G-SDI	-
	SDI	1080p 24/25/30, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...	-
AUDIO IN/OUT	HDMI	2160p 24/25/30, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...	2160p 24/25/30, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...
	Speaker	2	2
POWER	SDI	16ch 48kHz 24-bit	-
	HDMI	8ch 24-bit	8ch 24-bit
ENVIRONMENT	Ear Jack	3.5mm - 2ch 48kHz 24-bit	3.5mm - 2ch 48kHz 24-bit
	Power Consumption	DC 12-24V	DC 12-24V
DIMENSION	Operating Temperature	≤36W (15V)	≤36W (15V)
	Storage Temperature	0°C-50°C	0°C-50°C
	Dimension(LWD)	-20°C-60°C	-20°C-60°C
	Weight	524.8mm × 313.3mm × 19.8mm	524.8mm × 313.3mm × 19.8mm
		4.8kg	4.8kg

Note: Due to constant effort to improve products and product features, specifications may change without notice.

ACCESSORIES