Panasonic BUSINESS

AW-UE100W [White Model]
AW-UE100K [Black Model]
4K Integrated Camera



High-quality 4K PTZ Camera compatible with a variety of video transmission systems to support next-generation video production

This 4K Integrated Camera is compatible with various IP transmission protocols, including NDI®*1, SRT*2, and FreeD*3, achieving flexible video production with high-quality 4K 60p/50p*4 video. 12G-SDI output is also supported in addition to 3G-SDI and HDMI, allowing the appropriate output to be selected for use in a wide range of situations, from live streaming of events to studio production.







AW-UE100K

4K Integrated Camera
[Black Model]

High-Quality 4K 60p/50p*4 Shooting

3840 x 2160 4K output and 59.94p/50p*4 shooting achieve extremely smooth video, even in live sports and other environments containing rapid movement.

Out	nut	for	mat
Out	μuι	101	mat

4K (12G-SDI output/HDMI output)	2160/59.94p, 2160/50p, 2160/29.97p*5, 2160/25p*5, 2160/24p*5, 2160/23.98p*5
HD (3G-SDI output/HDMI output)	1080/59.94p, 1080/50p, 1080/29.97p*5, 1080/29.97psF*6, 1080/25p*5, 1080/25PsF*6, 1080/23.98p*7, 1080/24p*5, 1080/23.98p*5, 1080/23.98PsF*6, 1080/59.94i, 1080/50i 720/59.94p, 720/50p

1/2.5-type MOS sensor


The camera is equipped with a newly-developed 1/2.5-type 4K MOS sensor and achieves high-resolution video.

Shooting with 24x optical zoom and a 74.1° horizontal angle of view

In addition to 24x optical zoom, the inclusion of i.Zoom enables super resolution zooming of up to 36x in HD Mode and 28x in 4K mode while maintaining high resolution. The 1.4x and 2x digital extender zoom also allows distant subjects to be captured clearly, while the 74.1° horizontal angle of view enables a wide area to be shot from a limited installation space.



■ Horizontal 74.1° Shooting Range



Camera Position

Newly-developed high-precision Direct Drive motor

The inclusion of a Direct Drive motor for the rotating section improves operability, responsiveness and quietness during pan/tilt operations.

operability

A wide range of speeds are supported, from slow movement of 0.08° per second to ultra-high speeds of 180° per second (Fast2 Mode).

responsiveness

Excellent responsiveness allows for accurate camera work, ensuring that the target area is captured.

quietness

A noise level of NC30 or less is ensured, enabling shooting in situations such as Concert hall and Studio where quietness is required.




Electronic Image Stabilization (EIS) for roll direction

Electronic Image Stabilization (EIS) for the roll direction has been added in addition to Optical Image Stabilization (OIS). Stable images with reduced blurring can be shot even in locations where special equipment such as a rail systems or camera arms are used.



High image quality and low latency with high bandwidth NDI® support

High bandwidth NDI® and high efficiency low bandwidth NDI®|HX, which encode and transmit high-quality video in real time, are included. High bandwidth NDI® transmits 4K video at a maximum of 250 Mbps and full HD video at a maximum of 125 Mbps, enabling high-quality, low-latency live video transmission.

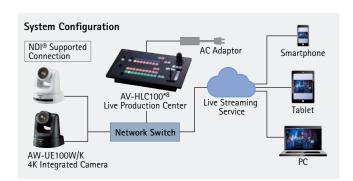

SRT*2 support for stable video transmission over public lines



SRT, a next-generation video transmission protocol with strong security suitable for unstable network environments, is supported.

Secure

Strong security is ensured by encrypting video data before transmission.

Reliable

The packet loss recovery function automatically detects and retransmits packets lost during transmission, ensuring smooth, stable video transmission.

Transport

The flexible and adaptable buffer management system enables stable video transmission even in network environments with unstable bit rates. Long-distance video transmission over public lines is supported.

■ Video transmission over public lines




Direct Broadcast via RTMP/RTMPS*9

RTMP/RTMPS*9 is supported to enable direct upload of video to live-streaming services such as YouTube Live and Facebook Live. This means a live stream can be broadcast directly from the camera.



FreeD*3 Support for Construction of AR/VR*10 Systems

Integration with AR/VR systems is available via FreeD-compliant command output. Camera tracking information (pan/tilt/zoom/focus/iris) is output according to a synchronizing signal to facilitate configuration of virtual systems without an encoder.

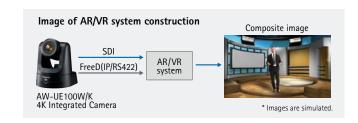

Cropping (+ Zoom) function

A cropped portion of the video can be created simultaneously during output of the full 4K video. Up to three crop areas can be specified, with easy operation using the AW-RP150GJ Remote Camera Controller and the web browser screen. The inclusion of cropping zoom also allows up to 5x zoom of cropped images.



* Images are simulated.

^{*1:} NDI® is a new live video production workflow support protocol for IP use developed by NewTek in the United States. In this instance, NDI® is used to indicate high bandwidth NDI®. *2: SRT: Secure Reliable Transport. *3: FreeD: Widely used protocol for transmitting camera tracking information, mainly in virtual studio systems. *4: Actual output format is UHD (3840 x 2160) 59.94p/50p. *5: Native output. *6: Cannot be output from HDMI. *7: It denotes *1080/23.98p over 59.94i*. *8: Only available during full HD operation. AV-HLC100 does not support 4K output. *9: RTMP: Real-Time Messaging Protocol. RTMPS: Real-Time Messaging Protocol. RTMPS: Real-Time Messaging Protocol Secure. *10: AR: Augmented Reality. VR: Virtual Reality. *11: Picture quality is lower with the cropping zoom.


Application Examples

Application 01: 4K Studio

Studio shooting of smooth, high-quality 4K 60p/50p*1 images

The AW-UE100W/K is capable of 4K 60p/50p*1 output for high-quality remote shooting in studio operations where high image quality is required. A large tally lamp has been equipped to make on-air cameras easily identifiable, even from far away.



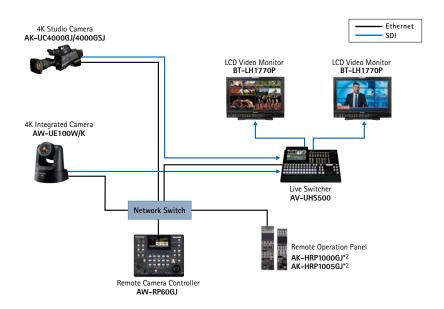


Application 02: Live Streaming

Select the optimal streaming workflow for each situation with RTMP/RTMPS and NDI®*3 support

When working with a single camera, video can be uploaded directly from AW-UE100W/K to live distribution services with RTMP/RTMPS. When multiple cameras are used, they can be connected to the AV-HLC100*2*4 Live Production Center with NDI®*3. Multiple AW-UE100W/K can be controlled from the AV-HLC100*2*4 for high-quality, low-latency live distribution.



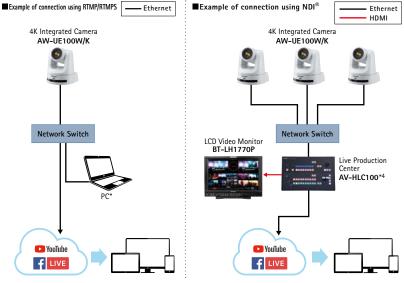


*A computer is required for server connection settings

Application 03: Halls

High-magnification zoom and wide-angle shooting ensure targets are captured clearly in large venues

The large 1/2.5-type MOS sensor enables high-sensitivity shooting with little noise in halls and other dark locations. The optical 24x zoom further ensures that even far-away targets shot in large venues are captured clearly. 74.1° horizontal wide-angle shooting allows incredible flexibility in shooting location while still being able to capture the entire shot.



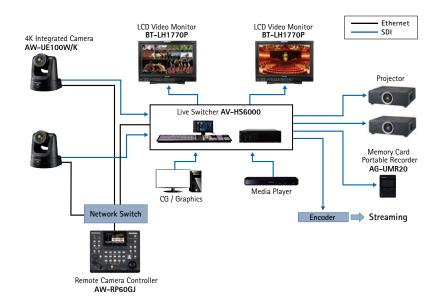

- *1: Actual output format is UHD (3840 x 2160) 59.94p/50p.
- *2: Use may require a software version update.
- *3: NDI® is a new live video production workflow support protocol for IP use developed by NewTek in the United States. In this instance, NDI® is used to indicate high bandwidth NDI®.
- *4: Only available during full HD operation. AV-HLC100 does not support 4K output.

Optional Products

■ PC Software for Remote Camera Support

Supporting Lecture Capture with Auto Tracking function

Auto Tracking Software Key Stand-Alone and Web App Versions AW-SF100*1 Server Version


AW-SF200*1

2 Additional Licenses (for AW-SF200) AW-SF202*1

3 Additional Licenses (for AW-SF200) AW-SF203*1


A 30-day Free Trial is Available


- High-performance auto tracking using highly-specialized facial recognition and deep learning technology allows the camera to follow lecturers in any direction.
- The AW-UE100W/K cropping function allows a single camera to crop and track up to three people.
- Operation with IP connection enables installation/control of cameras in remote classroom.
- AW-SF100 allows a single PTZ camera to be controlled on either a stand-alone or web application version. AW-SF200 operates on a server.
- The web application version enables camera control from a tablet, smartphone, desktop PC, etc.
- AW-SF200 enables simultaneous auto tracking and centralized control of multiple cameras.*2



Control multiple PTZ Cameras from PC

PTZ Control Center Free software







Main screen

- Clicking the preset button attached to thumbnails enables simple recall of presets.
- Pan, tilt, zoom and other operations can also be controlled using game controllers made by other companies.

Software that converts PTZ camera on your network into Super Web cam

PTZ Virtual USB Driver Free software

AW-SF200 Main View

- Remote cameras on the network can be used as USB cameras for simple execution of web meetings with high image quality.
- Camera controls such as image quality adjustment and pan/ tilt/zoom can be operated from the GUI.
- Up to five cameras can be registered.
- Automatic detection of connected cameras and network settings enabled.

Optional Products

Remote Camera Controller AW-RP150GJ*3

● A separate AC adaptor or PoE+ HUB is required for power supply.



Live Production Center AV-HLC100*3



Remote Camera Controller AW-RP60*3

 A separate AC adaptor or PoE HUB is required for power supply.



Remote Operation Panel (ROP)

AK-HRP1000GJ*3*4 AK-HRP1005GJ*3*4*5 AK-HRP1015GJ*3*6

● A separate PoE HUB is required for power supply.



Live Switcher AV-UHS500



Wireless remote control AW-RM50G

("AA", "R6" or "LR6" battery x2 are not included.)



KAIROS

IT/IP Platform **KAIROS**



As of August, 2020

https://pro-av.panasonic.net/en/products/it_ip_platform/





^{*2:} Up to four cameras per server can be controlled simultaneously.

*Depending on the shooting environment, the system may not be able to detect or track the target correctly. Please use this software in an environment where the adjustment work can be performed by the operator to deal with errors in detection and auto tracking. *There is a 30-day free trial available for the Auto Tracking Software. Please read carefully the precautions for this software and check if it works correctly in your operating environment before you purchase "Auto Tracking Software Activation Key". For further information, please see "Download/Software Download" on the Panasonic website https://pro-av.panasonic.net/.

[•] The face recognition function is based upon the face recognition software developed by PUX Corporation.

^{*} For further information on the optional software, please see "Download/Software Download" on the Panasonic website https://pro-av.panasonic.net/.

^{*3:} Use may require a software version update.

^{*4:} Support planned for the future

^{*5:} Limited Stock

^{*6:} Scheduled for release in the fourth quarter of CY2020. Not available in some areas.

Specifications

<gener <="" th=""><th>AL></th><th></th></gener>	AL>		
Power Requirements:		12 V DC (10.8 V to 13.2 V) (Supplied AC adaptor) 42 V to 57 V DC (PoE++ power supply)	
PoE++:		IEEE802.3bt standard: DC 42 V to 57 V (Camera Input) (Software authentication (LLDP) is supported)	
Current Consumption:		3.0 A (Supplied AC adaptor) 1.0 A (PoE++ power supply)	
Ambient Opera	ting Temperature:	0 °C to 40 °C (32 °F to 104 °F)	
Ambient Oper	ating Humidity:	20 % to 90 % (no condensation)	
Storage Ten	perature:	-20 °C to 50 °C (-4 °F to 122 °F)	
Mass:		Approx. 2.2 kg (4.84 lb) (excluding cable cover, mount bracket) Approx. 2.3 kg (5.06 lb) (including cable cover, excluding mount bracket)	
Dimensions (W x H x D):		169.2 mm x 204.6 mm x 170.6 mm (6-21/32 inches x 8-1/16 inches x 6-23/32 inches) (excluding protrusions, cable cover, mount bracket)	
Finish:		AW-UE100WP/AW-UE100WPC/AW-UE100WE/AW-UE100WED: Pearl white AW-UE100KP/AW-UE100KPC/AW-UE100KE/AW-UE100KED: Black	
Controller S	upported:	AW-RP150GJ, AW-RP60GJ	
<camera< td=""><td>Unit></td><td></td></camera<>	Unit>		
Imaging Ser	nsors:	1/2.5-type 4K MOS x 1	
Lens:		Motorized Optical 24x zoom, F1.8 to F4.0 [f=4.12 mm (5/32 inches) to 98.9 mm (3-29/32 inches); 35 mm (1-3/8 inches) equivalent: 25.0 mm (31/32 inches) to 600.0 mm (23-5/8 inches)]	
Zoom:		 Optical zoom : 24x i.Zoom: UHD 28x, FHD 36x Digital extender zoom: 1.4x, 2x 	
Conversion	Lens:	Not supported	
Angle of View Range:		Horizontal angle of view: 74.1°(wide) to 3.3°(tele) Vertical angle of view: 46.0°(wide) to 1.9°(tele) Diagonal angle of view: 81.8°(wide) to 3.8°(tele)	
Optical Filte	er:	Through, 1/4, 1/16, 1/64, IR through (IR through is used as "Night mode")	
Focus:		Switching between auto and manual	
Focus Distance:		Entire zooming range: 1200 mm (3.9 ft) Wide end: 100 mm (0.33 ft)	
Color Separatio	n Optical System:	1MOS	
Standard Sensitivity:		F4/2000 lx (When [Shooting Mode] is [Normal]) F5.6/2000 lx (When [Shooting Mode] is [High Sens.])	
Minimum II	lumination:	3 lx (conditions: F1.8, 59.94p, 50 IRE, 42 dB, without accumulation)	
S/N:		60dB(typ) (When [Shooting Mode] is [Normal])	
Horizontal F		1500 TV lines Typ (Center area)	
Gain Selecti	on:	Auto, 0 dB to 36 dB*1 • Super Gain function installed: 37 dB to 42 dB	
Frame Mix*	:	Auto, 0 dB, 6 dB, 12 dB, 18 dB, 24 dB	
Electronic Shutter	59.94p/59.94i	1/60, 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/10000	
Speed:	29.97p	1/30, 1/60, 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/10000	
	23.98p/24p	1/24, 1/48, 1/60, 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/10000	
	50p/50i 25p	1/60, 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/10000 1/25, 1/50, 1/60, 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000,	
Synchro	'	1/4000, 1/8000, 1/10000 60.00 Hz to 7200 Hz	
Scan:	29.97p	30.00 Hz to 7200 Hz	
	23.98p/24p	24.00 Hz to 7200 Hz	
	50p/50i	50.00 Hz to 7200 Hz	
	25p	25.00 Hz to 7200 Hz	
Gamma:		HD/FILMLIKE1/FILMLIKE2/FILMLIKE3	
White Balar	ice:	ATW, 3200K, 5600K AWB: AWB-A/AWB-B VAR (selectable between 2000K and 15000K by designating a value)	
Chroma Amount Variability:		OFF, -99 % to 99 %	
Scene File:		Scene1, Scene2, Scene3, Scene4	
Output Format:	SDI Output 4K	2160/59.94p, 2160/50p, 2160/29.97p*³, 2160/25p*³, 2160/24p*³, 2160/23.98p*³	
	SDI Output HD	1080/59.94p, 1080/50p, 1080/29.97p°³, 1080/29.97PsF, 1080/25p°³, 1080/25PsF, 1080/23.98p°³, 1080/24p°³, 1080/23.98p°³, 1080/23.98psF, 1080/59.94i, 1080/50i, 720/59.94p, 720/50p	

Output Format:	HDMI Output 4K	2160/59.94p, 2160/50p, 2160/29.97p*3, 2160/25p*3, 2160/24p*3, 2160/23.98p*3
	HDMI Output HD	$1080/59.94p, 1080/50p, 1080/29.97p^{*o}, 1080/25p^{*o}, 1080/23.98p^{*to}, \\ 1080/24p^{*o}, 1080/23.98p^{*o}, 1080/59.94i, 1080/50i, 720/59.94p, \\ 720/50p$
<synchro< td=""><td>onization S</td><td>ystem></td></synchro<>	onization S	ystem>
		Internal / External synchronization (BBS / Tri-level sync)
<input/>		
Input	DC IN 12 V	
Connector:	G/L IN	BBS (Black Burst Sync), tri-level sync supported 75 Ω terminal (BNCx1)
	AUDIO IN	MIC/LINE input Compatible (SDI/HDMI/IP) AAC compatible (compatible with IP only) a.5. mm stereo mini jack Input impedance: Approx. 10 kΩ (unbalanced) • During MIC input Input level: -40 dBV (0 dB=1 V/Pa, 1 kHz) Plug-in power compatible, supply voltage: 2.5 V ± 0.5 V • During LINE input Input level: -10 dBV • Input volume variable range: -36 dB to 12 dB (3 dB step) • Embedded audio output level: -12 dBFS • Sampling frequency: 48 kHz • Quantization bit rate: 24bit (SDI, HDMI), 16bit (IP)
<outpu< td=""><td>Γ></td><td></td></outpu<>	Γ>	
Video Output:	HDMI	HDMI 2.0 connector 4:2:2/10bit • HDCP is not supported. • Viera Link is not supported.
	12G-SDI OUT	SMPTE 2082-1/SMPTE292 standard/75 Ω (BNC x 1)
	3G-SDI OUT	SMPTE292/75 Ω (BNC x 1) • Level-A/Level-B supported
<input 0<="" td=""/> <td>OUTPUT></td> <td></td>	OUTPUT>	
Input / Output Connector:	LAN	RJ-45 LAN terminal for IP control and video transmission PoE++ power terminal (IEEE802.3bt compliant)
	RS-422	CONTROL IN RS-422A (RJ-45)
<pan-tilt< td=""><td>t Head Unit</td><td>t></td></pan-tilt<>	t Head Unit	t>
<pan-tilt camera="" control:<="" head="" pan-tilt="" td="" uni=""><td>Propose the proof of the proof</td></pan-tilt>		Propose the proof of the proof
		AW protocol connecting cable LAN cable* (category 5e or above, straight cable), max. 1000 m (3280 ft
Installation	Method:	Stand-alone (Desktop) or suspended (Hanging)*6
Pan/tilt Operation Speed:		Speed range: 0.08°/s to 60°/s (Normal mode) • 3 speed modes installed Normal: 60°/s, Fast1: 90°/s*', Fast2: 180°/s*'
Panning Range:		±175°
Tilting range:		-30° to 210°*8

NC30 or less

<supported and="" browsers="" operating="" systems="" web="">*9</supported>		
Supported operating systems and web	Windows	Microsoft® Windows® 10 Windows® Internet Explorer® 11 (64bit/32bit) Microsoft Edge Google Chrome
browsers:	Mac	macOS 10.13/Safari 13 macOS 10.14/Safari 13 macOS 10.15/Safari 13 macOS 10.15/Google Chrome
	iPhone / iPad	iOS Safari iPadOS
	Android	Android OS Google Chrome

<IP Streaming>

Quietness:

Image Streaming Mode:	JPEG(MJPEG), H.264, H.265, NDI® HX, High Bandwidth NDI®
Image Resolution:	3840x2160, 1920x1080, 1280x720, 640x360, 320x180
Image Transmission setting (JPEG):	Frame Rate: Maximum 30 fps Image quality (Fine / Normal)

Image Transmission Setting (H.264):

■ Transmission Type: Unicast port (AUTO) Unicast port (MANUAL) Multicast port

■ Transmission Priority Constant bit rate Frame rate

Best effort Frame Rate

[60Hz] 5fps/15fps/30fps/60fps (UHD: 30fps, 60fps) [50Hz] 5fps/12.5fps/25fps/50fps (UHD: 25fps, 50fps)

512kbps/768kbps/1024kbps/1536kbps/2048kbps/3072kbps/4096kbps/ 6144kbps/8192kbps/10240kbps/12288kbps/14336kbps/16384kbps/ 20480kbps/24576kbps/32768kbps/40960kbps/51200kbps/76800kbps

Image Transmission Setting (H.265):

■ Transmission Type: Unicast port (AUTO) Unicast port (MANUAL) Multicast port

Frame Rate [60Hz]30fps [50Hz]25fps

Max Bit Rate 8192kbps/12288kbps/25600kbps/51200kbps/76800kbps Audio Compression Type: AAC-LC, 48 kHz / 16 bit / 2ch

Supported Protocol: ■ IPv6: TCP/IP, UDP/IP, HTTP, HTTPS, DNS, NTP, DHCPv6, RTP, MLD,

ICMP, ARP, RTMP, SRT
■ IPv4: TCP/IP, UDP/IP, HTTP, HTTPS, RTSP, RTP, RTP/RTCP, DHCP, DNS, DDNS, NTP, IGMP, ICMP, ARP, RTMP, RTMPS, SRT

<Other Function>


NDI® | HX : Included as standard High Bandwidth NDI®: Included as standard NDI® support:


Tally LED display color: red / green


*1: 1 dB steps. *2: This cannot be configured when the format is 2160/29.97p, 2160/23.98p, 2160/24p, 2160/25p, 1080/29.97p, 1080/23.98p(\$9.94i), 1080/29.97Ps, 1080/23.98Ps, 1080/25p, 108 is disturbing, use the Normal mode. *8: Depending on the pan or tilt position, the camera may be reflected in the image. *9: Supported OS indicated are for browsers current as of August 2020. See "Service and Support / PASS" on the Panasonic website (https://pro-av.panasonic.net/en/) for the latest information on browser support. *10: It denotes "1080/23.98p over 59.94p"

Dimensions As of August, 2020

Unit: mm (inches)








Rear View

AUDIO IN

Bottom View



NewTek, Inc.

TriCaster TC1 2RU TC1

Operation-verified in June. 2020







Explorer Inc. SRT compatible H.265/HEVC 4K/2K decoder EHU-3410D Operation-verified in June. 2020



Haivision SRT Set Top Box Haivision Play Set-Top Box 4000 Operation-verified in June. 2020



GeoVision

PoE Adapter **GV-PA901** Operation-verified in Mar. 2017







NETGEAR 10-PORT GIGABIT ETHERNET ULTRA60 POE++ SMART MANAGED PRO DESKTOP SWITCH

GS110TUP*1

Operation-verified in Mar. 2020



NETGEAR 10-PORT GIGABIT ULTRA60 POE++ SMART MANAGED PRO RACKMOUNT SWITCH

GS710TUP*1 Operation-verified in Mar. 2020



Allied Telesis

Gigabit Layer3 PoE++ Switch AT-x320-10GH*1

Operation-verified in Mar. 2020



•Power supply not included. AT-PWR300 is required.

PLANET Technology Corp.

Layer 3 8-Port 10/100/1000T 802.3bt PoE + 2-Port 10/100/1000T + 2-Port 10G SFP+ Managed Switch

GS-5220-8UP2T2X

Operation-verified in Oct. 2018



*1: LLDP authentication is planned for future support.

Third-Party Inquiries

- •<NewTek, Inc.> https://www.ndi.tv/ MAIL: ndi@newtek.com TEL: +1 210-370-8000
- •<Explorer Inc.> MAIL: sales@explorer-inc.co.jp TEL: +81(138)47-7604
- •<Haivision> https://www.haivision.com/contact/
- •<GeoVision Inc.> MAIL: sales@geovision.com.tw TEL: +886-2-8797-8376
- •<NETGEAR, Inc> http://www.netgear.com/home/contact-us/ •<Allied Telesis> (North America) http://alliedtelesis.com/contact

(Asia/Pacific) customer_info@alliedtelesis.com

(EMEA) Customer_info@alliedtelesis.com (Central South America) Customer_info@alliedtelesis.com

•<PLANET Technology Corp.> https://www.planet.com.tw/en MAIL: sales@planet.com.tw

- * Microsoft®, Windows®, Windows® XP, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10 and Internet Explorer® are either registered trademarks or trademarks of Microsoft Corporation in the United States and other countries.
- * Apple, Mac, OS X, iPhone, iPod Touch, iPad, and Safari are registered trademarks of Apple Inc., in the United States and other countries.
- * Android™ is a trademark of Google Inc.
- * "YouTube" and the "YouTube logo" are registered trademarks of Google Inc.
- * "Facebook" is a registered trademark of Facebook, Inc.
- * NDI® and NDI® HX are registered trademarks of NewTek, Inc. in the United States.

Panasonic

Panasonic Corporation Connected Solutions Company

2-15 Matsuba-cho, Kadoma, Osaka 571-8503 Japan



Factories of AVC Networks Company have received ISO14001:2004-the Environmental Management System certification. (Except for 3rd party's peripherals.)



For more information, please visit Panasonic web site https://pro-av.panasonic.net/en/qr/



Broadcast and Professional AV Website



Contact Information



Facebook



Mobile App

^{*} Specifications are subject to change without notice.