


**Lupo**  
Made in Italy

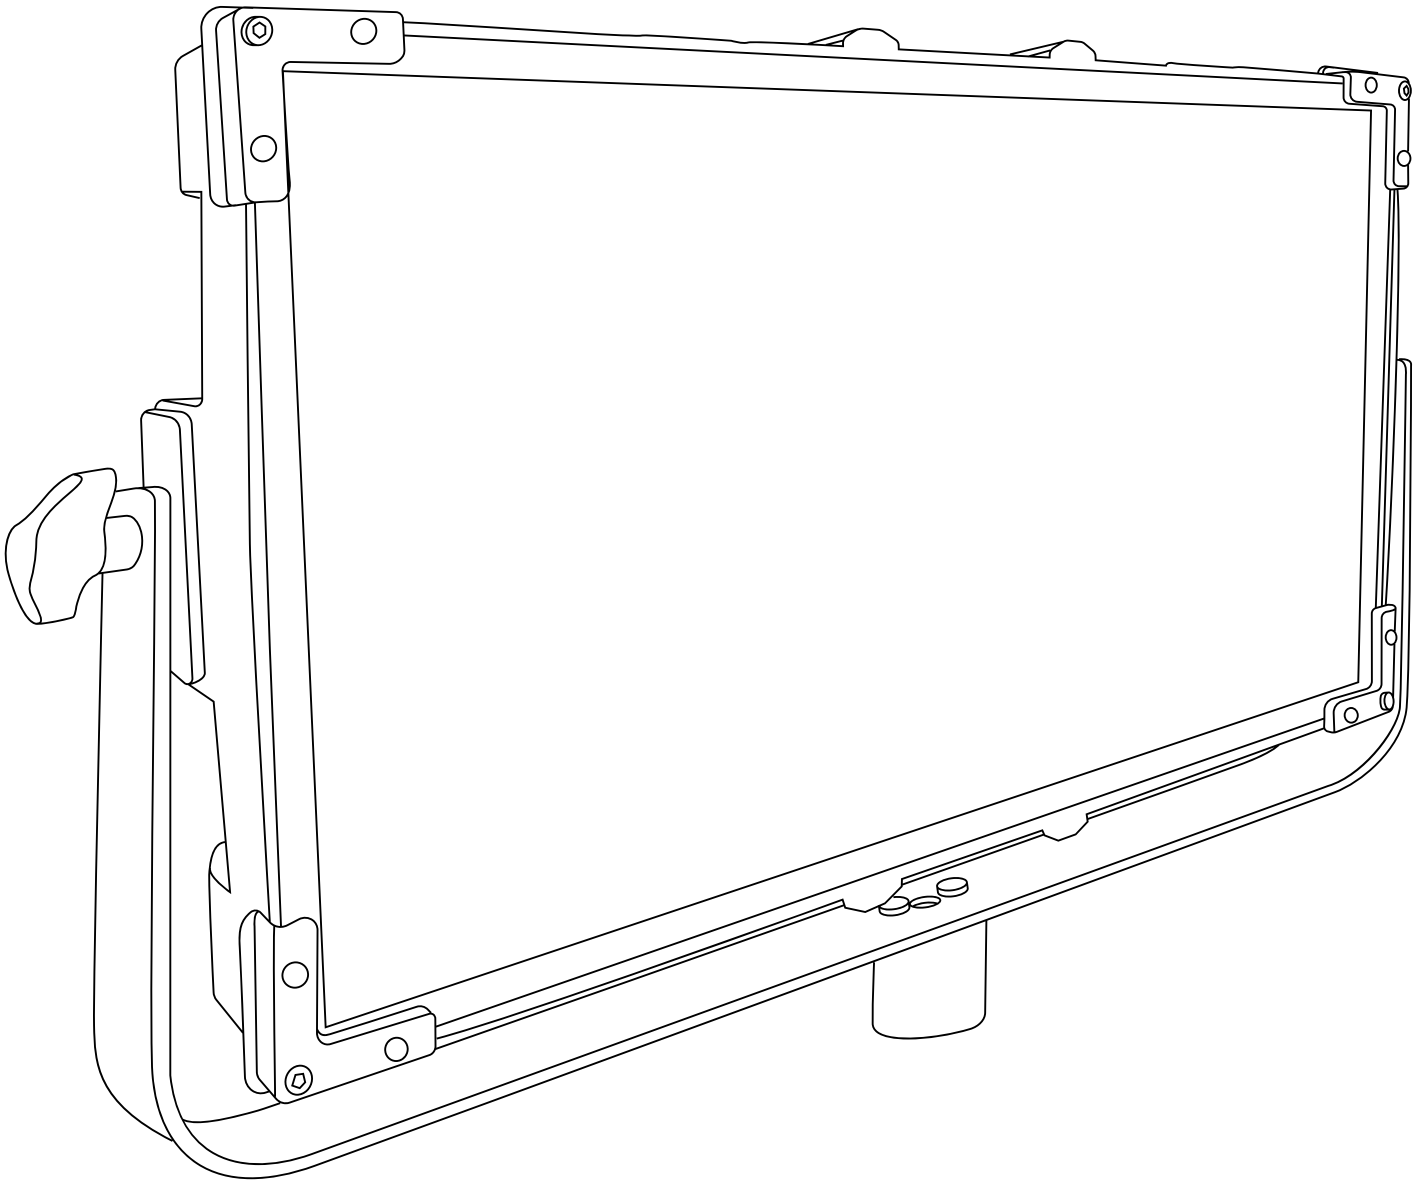

Cod 414 PRO

# **SuperpanelPRO**





## **Dual Color Soft 60**

## Technical Data


Dimensions (cm)	691 x 465 x 121 mm
Dimensions (in)	27.2 x 18.3 x 4.21 in
Weight (kg)	9 kg
Weight (lb)	19.8 lb
CRI (Colour Rendering Index)	97
TLCI (Television Lighting Consistency Index)	98
Estimated LED lifetime (L80)	50,000 hours
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
DMX module	included
DMX (bit)	8 bit / 16 bit
Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive)	included
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	440 W
Watt output (equivalent to tungsten)	4000 W
Firmware upgrades	through USB port
Colour temperature	2800 K - 6500 K
Voltage AC	90 V - 240 V
Voltage DC	14.8 V
Light beam	120°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power factor	0.9

Photometric data	6500 K	5600 K	3200 K
Distance			
Lux at 1 m - 3.2 ft	8500	8400	8300
Lux at 2 m - 6.5 ft	2440	2360	2160
Lux at 3 m - 9.8 ft	1180	1120	1060
Lux at 4 m - 13.1 ft	740	680	600
Lux at 5 m - 16.4 ft	490	460	390

# Technical Drawing

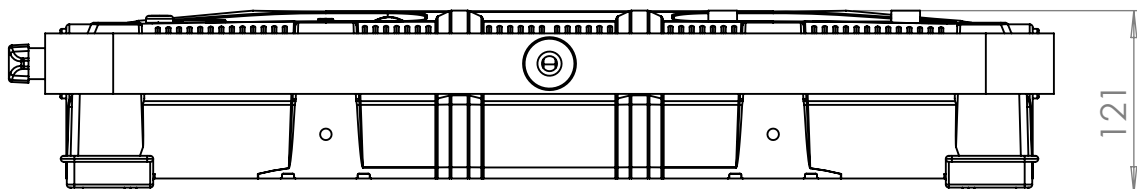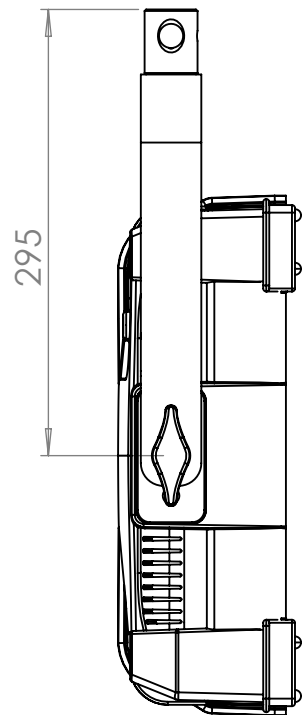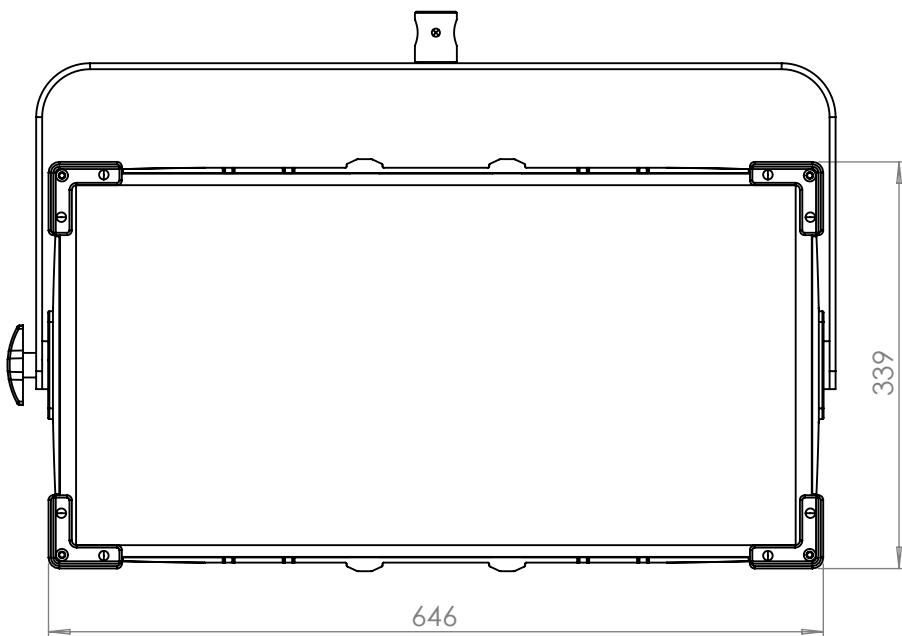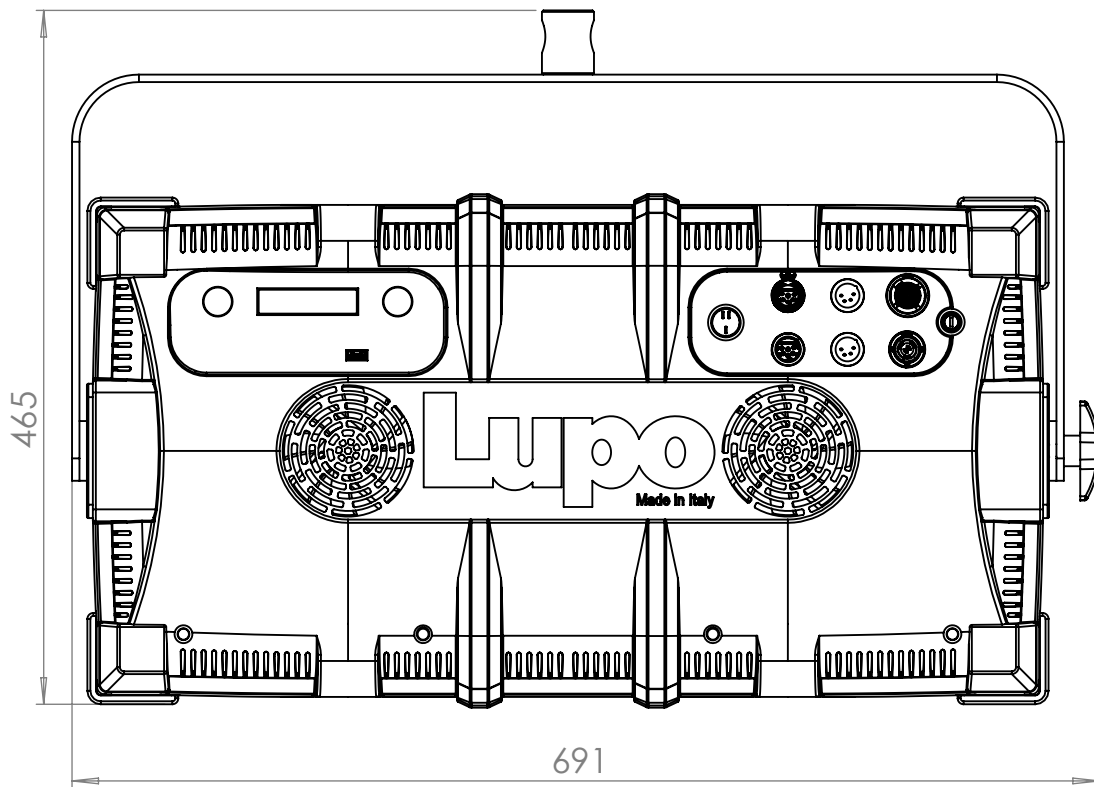

# Pole Operated Yoke

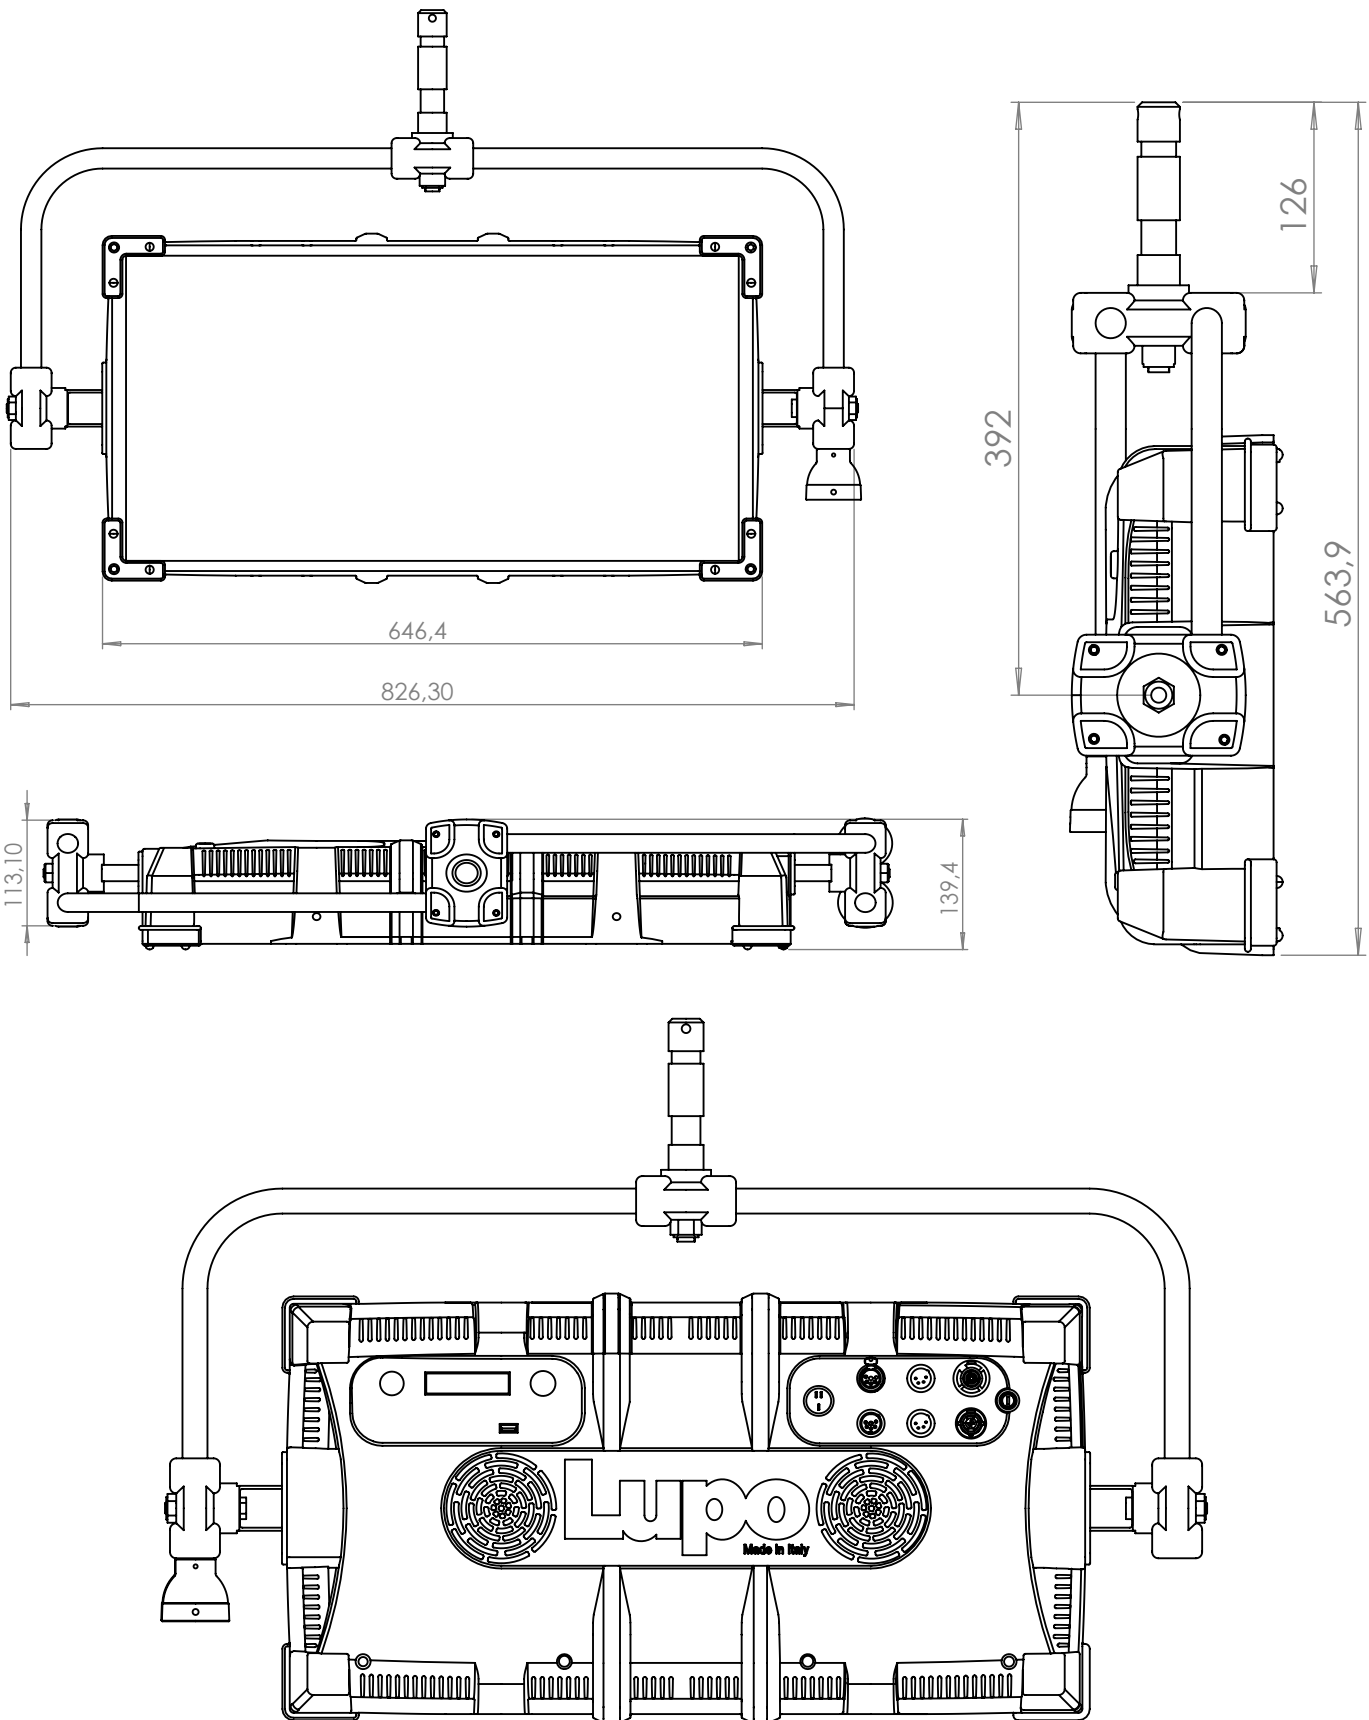

**Lupo**  
Made in Italy

Lupo srl - Via V. Sassi 28 Collegno (TO) - 10093 - Italy  
Phone: +39 011 411 9919 / e-mail: [contact@lupo.it](mailto:contact@lupo.it)  
website: [www.lupo.it](http://www.lupo.it)