


flexible LED

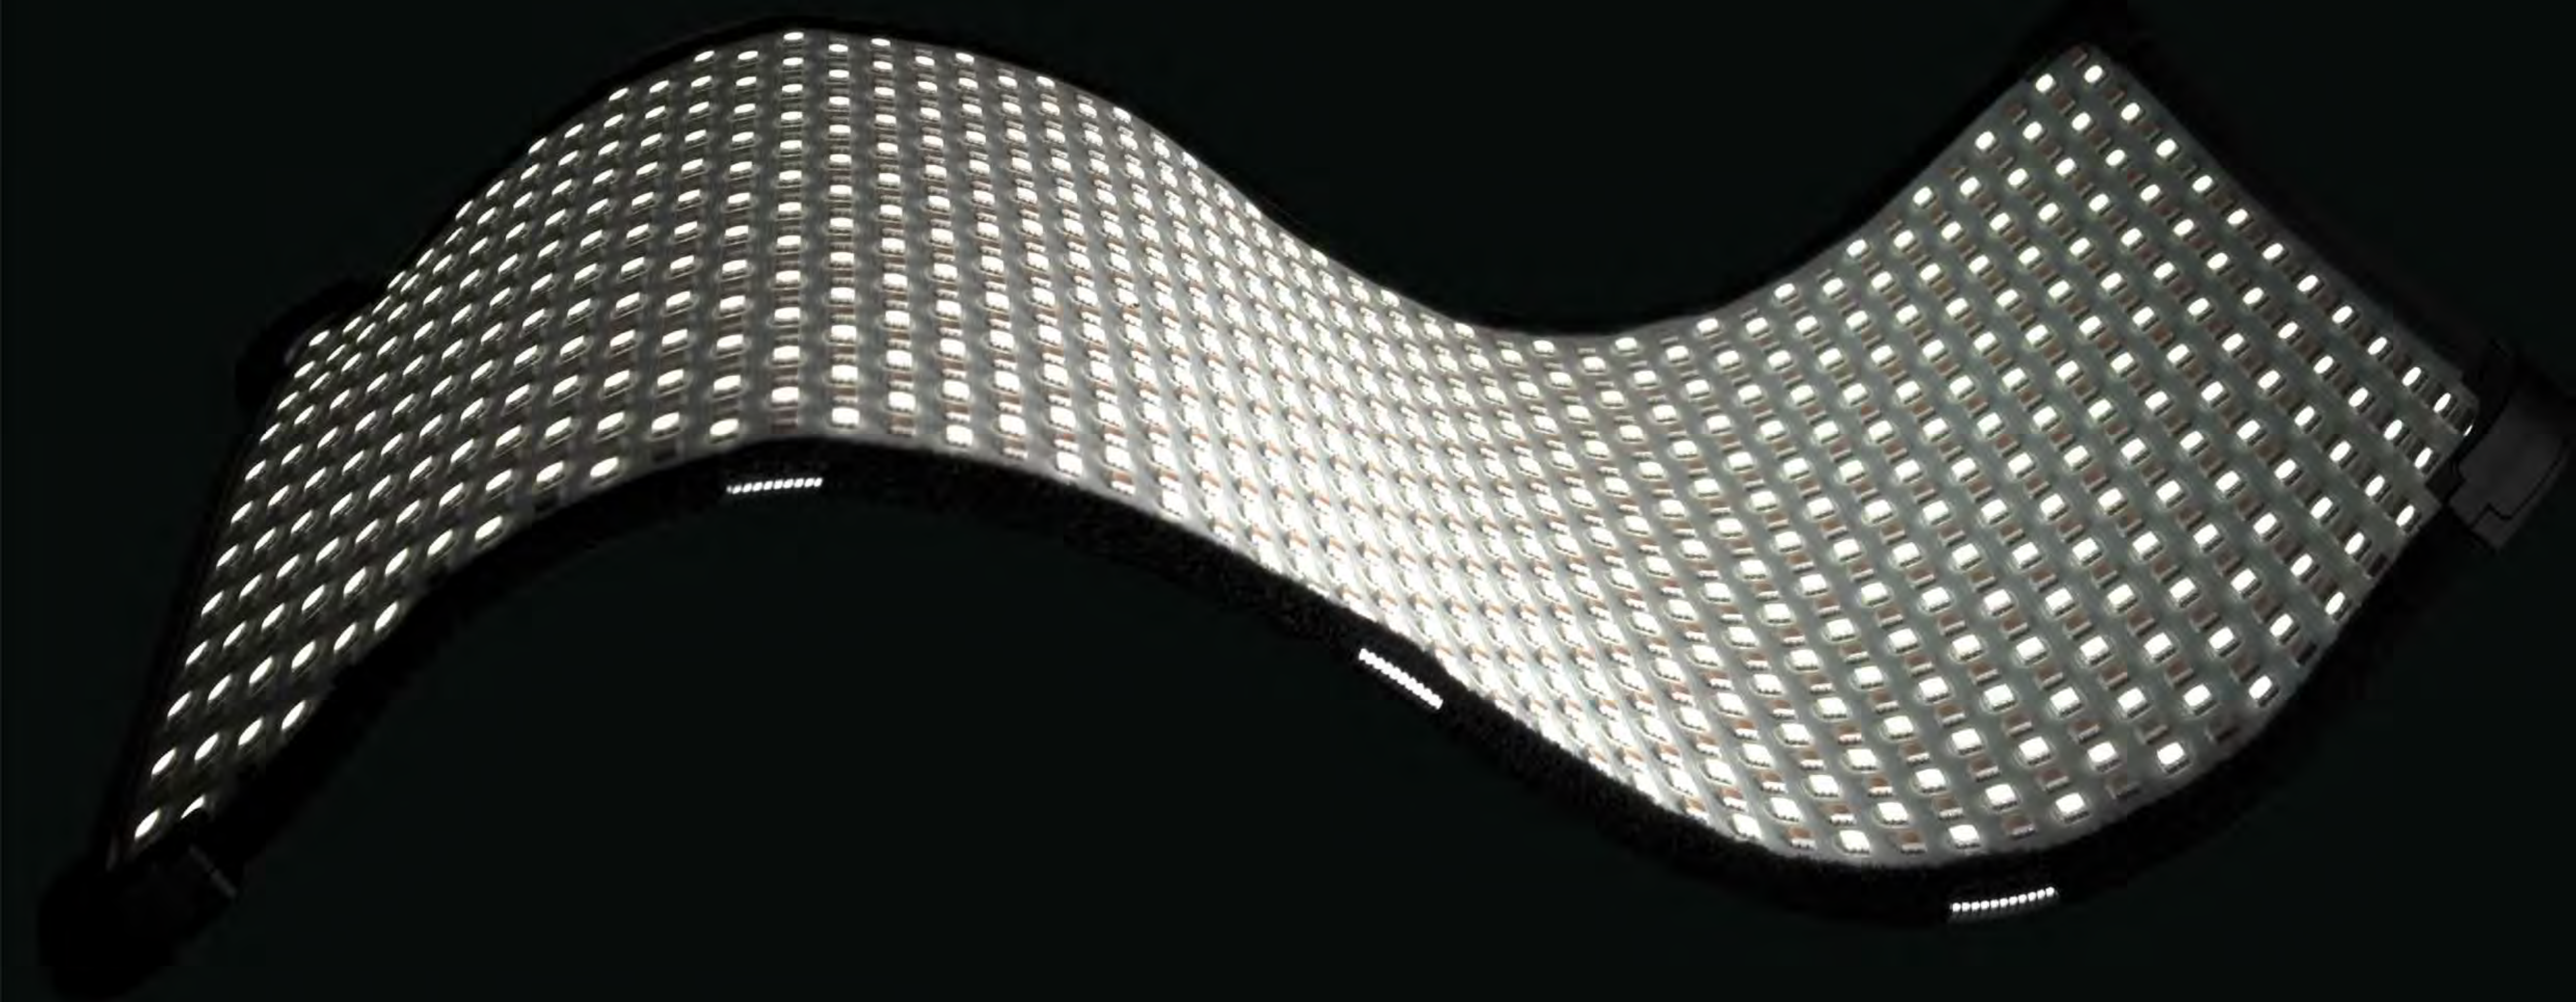

FL 600 / 1200

Pliable form. **Powerful and precise** lighting. High-quality **Filmmaking** Performance.

FOMEX Flexible LED Light provides a versatile lighting system through significant improvements, allowing cinematographers and photographers the versatility of having a flexible and rigid LED light in one.

Superior feature of FL 1200 DMX Control. Lock function to stay fixed value of light output & color temperature. Quick function to select pre-set color temperature.



FOMEX flexible LED

The portable FOMEX Flexible LED light gives variable color temperature control – Tungsten through Daylight. FL 600 / FL 1200 have a CRI and TLCI rating of 98 to ensure high color purity. Their pliable form allows setup in a variety of places where normal light fixtures or panels can not go. Designed with precise dimming control and IP64 rainproof rating.





FL 600




FL 1200



Spectrum Report

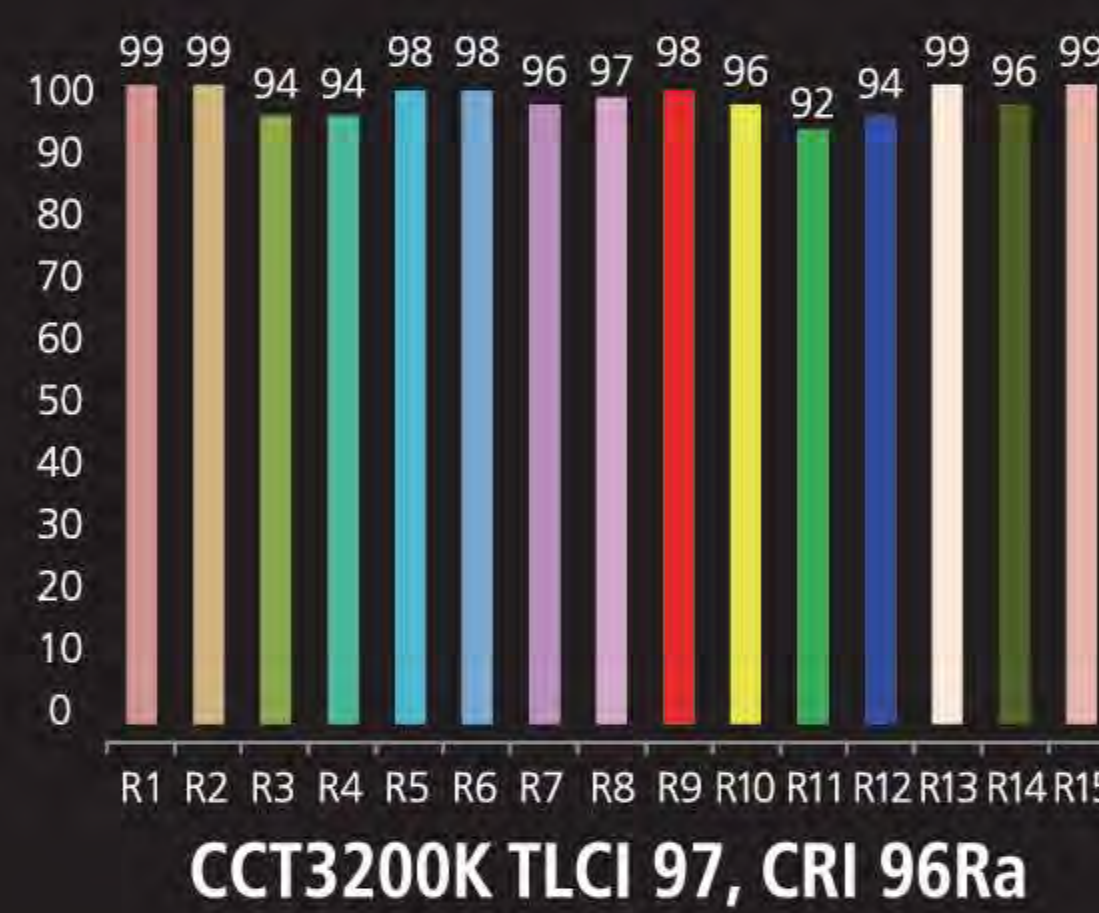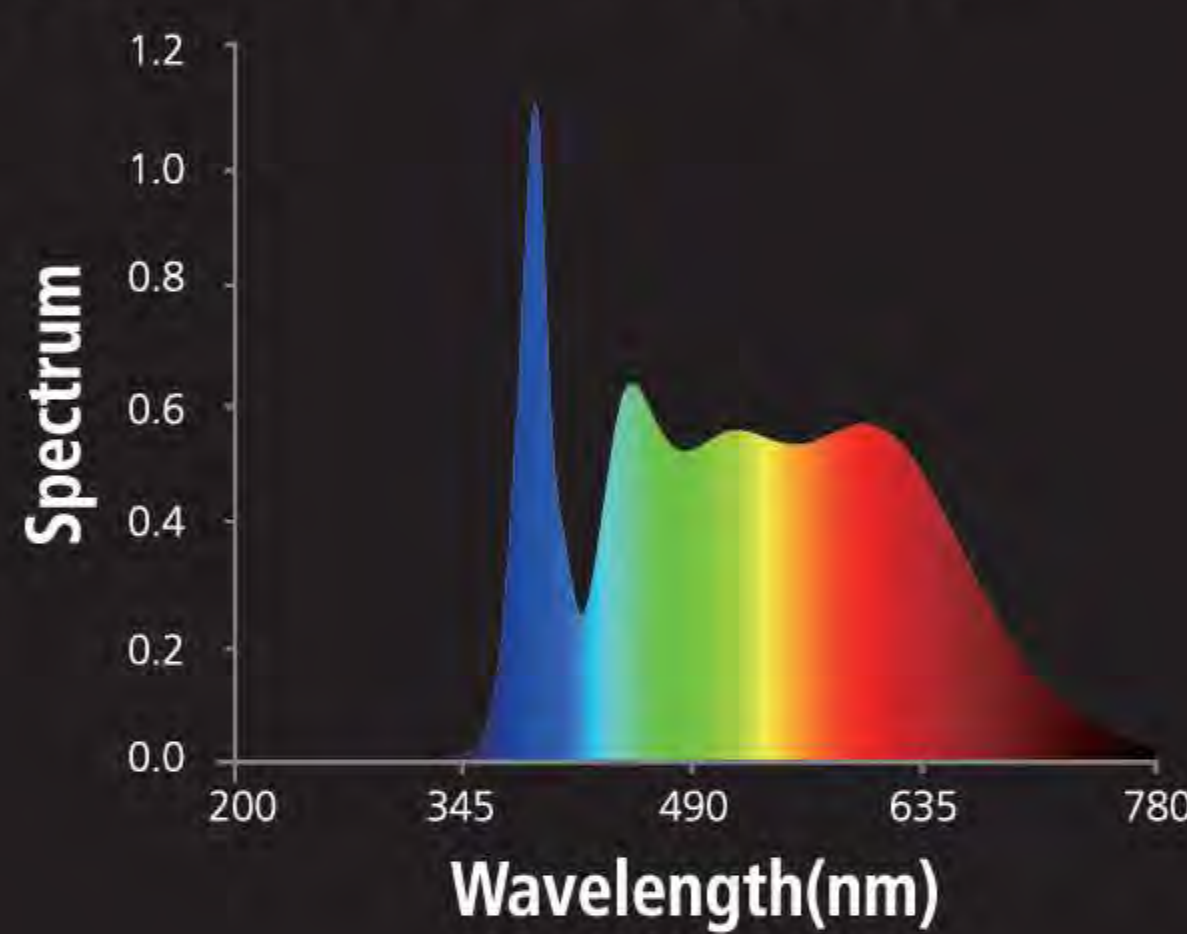

CCT3200K TLCI 97, CRI 96Ra

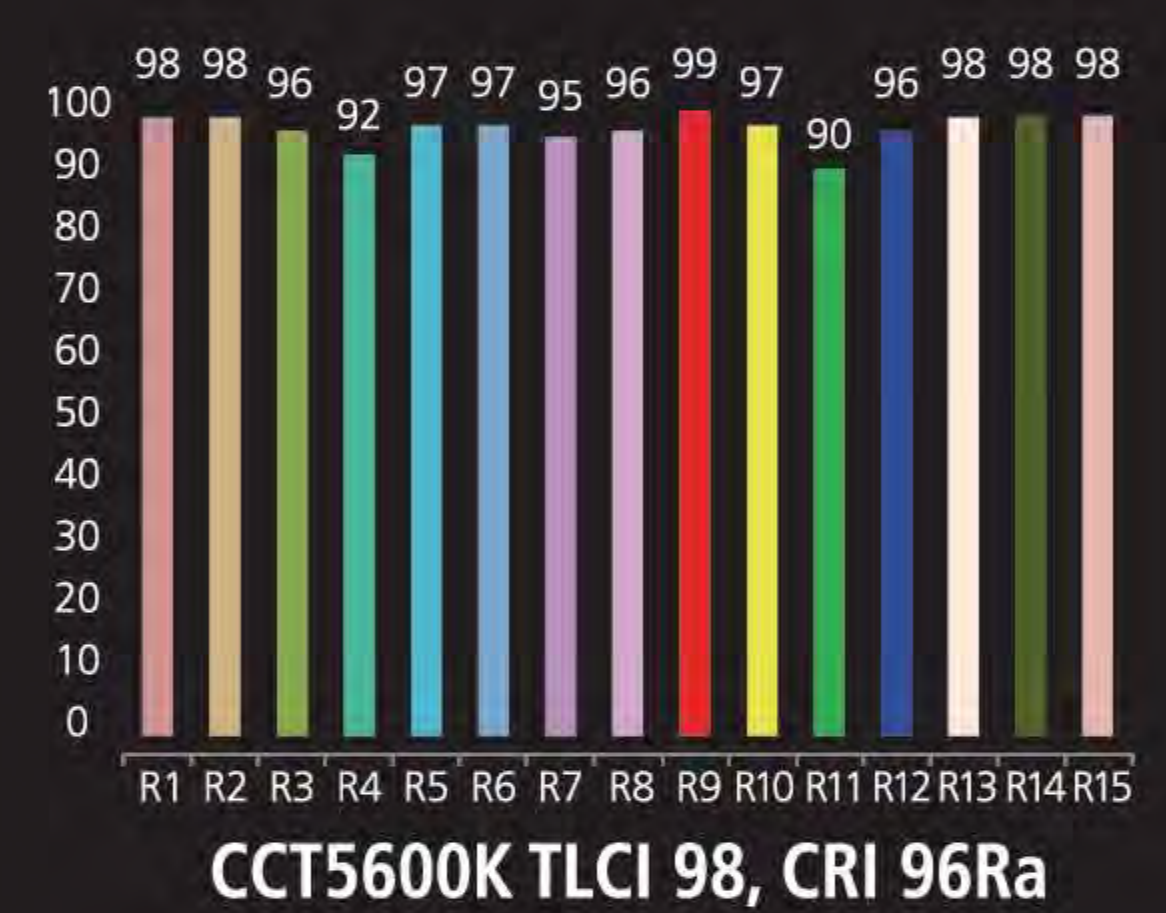

CCT5600K TLCI 98, CRI 96Ra

Specification

Model	FL 600	FL 1200
Light Output(Lux)	1900lx @1m; 3200K 2000lx @1m; 5600K	3800lx @1m; 2700K 4000lx @1m; 6500K
Power Consumption	60W	120W
CRI / TLCI	CRI 96~98 / TLCI 98	CRI 96~98 / TLCI 98
Color Temperature	3200K~5600K	2700K- 6500K
Dimmer	0~100% DIM / Manual	0~100% DIM / DMX 512 / Manual
Color Temp Control	50K Steps	100K Steps
Light Output Connector	6Pin Waterproof	4Pin Waterproof
IP Rating	IP64	IP64
DC Input	DC 13.8~24V (6Pin)	DC 12~24V (4Pin)
DMX In / Out	-	5Pin XLR
Beam Angle	120°	120°
LEDs	576	1152
Battery Mounts	V-Mount / Gold Mount	V-Mount / Gold Mount
Dimensions (mm)	300 X 300	300 X 580
Weight	415g	760g



SCAN
QR CODE
TO SEE FOMEX

Unit701, 31-18Gil, Seongsui-ro, Seongdong-gu, Seoul Korea 04787 Tel +82 2 545 0004 Fax +82 2 3444 9399

www.fomex.com e-mail : info@fomex.com

All product specifications are subject to change without prior notice